

LOC I-OXR 108.7	APP CRS 256°	Rwy ldg TDZE Apt Elev	5500 44 45
---------------------------	------------------------	-----------------------------	---------------------------------------

ILS or LOC RWY 25


OXNARD (OXR)

⚠ Rwy 25 helicopter visibility reduction below 3/4 SM NA. Autopilot coupled approach NA below 867'. Inop table does not apply. When local altimeter setting not received, use Camarillo altimeter setting and increase S-ILS 25 DA to 312 and all MDA 20 feet, increase S-LOC 25 Cat C/D visibility 1/2 mile, and Circling Cat C visibility 1/2 mile, Cat D 1/4 mile.



MISSED APPROACH: Climb to 520 then climbing left turn to 2000 on CMA VOR/DME R-249 to SQUID INT/14.7 DME and hold.


ATIS 118.05	POINT MUGU APP CON * 124.7 335.5	OXNARD TOWER * 134.95 (CTAF) 0 257.8	GND CON 121.9
-----------------------	--	--	-------------------------

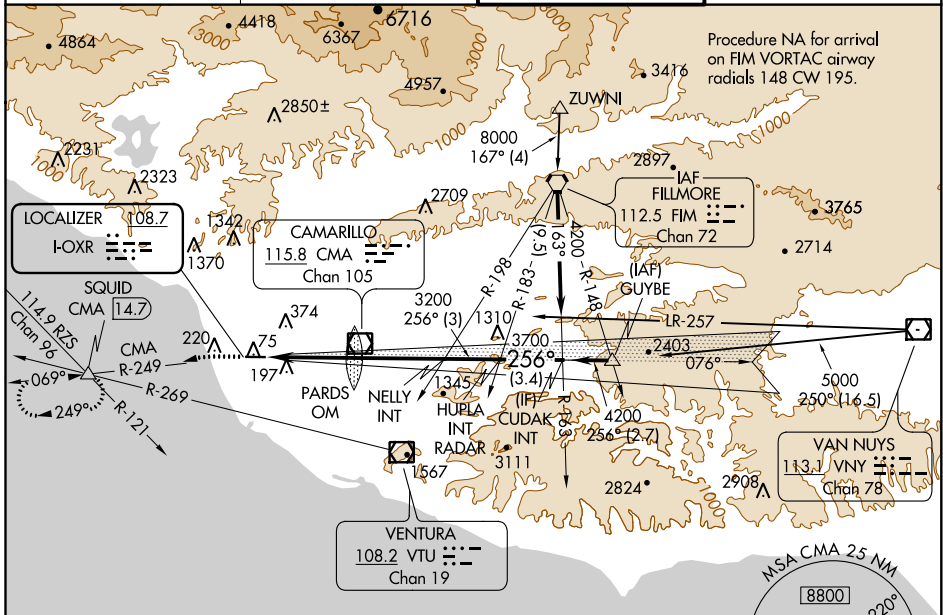


SW-3, 10 SEP 2020 to 08 OCT 2020

SW-3, 10 SEP 2020 to 08 OCT 2020

ELEV 45	D	TDZE 44
---------	----------	---------



REIL Rwy 7	MIRL Rwy 7-25
FAF to MAP 9.7 NM	
Knots	60 90 120 150 180
Min:Sec	9:42 6:28 4:51 3:53 3:14

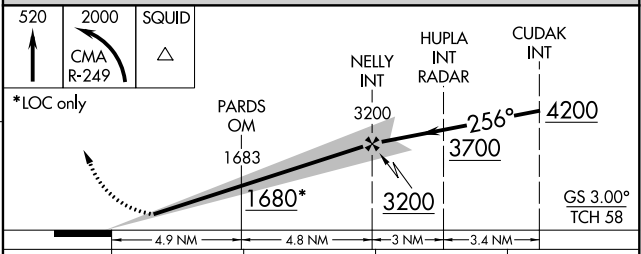

CATEGORY	A	B	C	D
S-ILS 25	294-1 250 (300-1)			
S-LOC 25	580-1	536 (600-1)	580-1½	536 (600-1½)
CIRCLING	580-1	535 (600-1)	580-1½	700-2 655 (700-2)