

WAAS CH 99313 W19A	APP CRS 190°	Rwy Idg TDZE Apt Elev	6604 91 91
--	------------------------	-----------------------------	---------------------------------------



RNAV (GPS) RWY 19

H L SONNY CALLAHAN (CQF)

⚠ Baro-VNAV NA when using Mobile Downtown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).
⚠ DME/DME RNP-0.3 NA. VDP NA with Mobile Downtown altimeter setting. When local altimeter setting not received, use Mobile Downtown altimeter setting and increase all DA 42 feet and all MDA 60 feet and increase LPV and LNAV/VNAV all Cats visibility 1/8 mile and LNAV Cats C and D visibility 1/4 mile.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct BFM Vortac and hold.

AWOS-3PT 118.425	MOBILE APP CON * 118.5 269.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

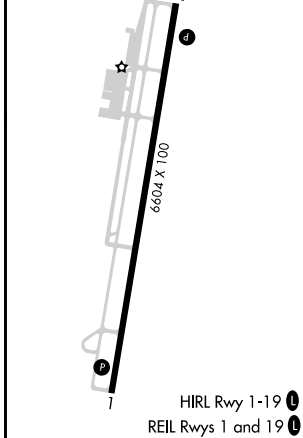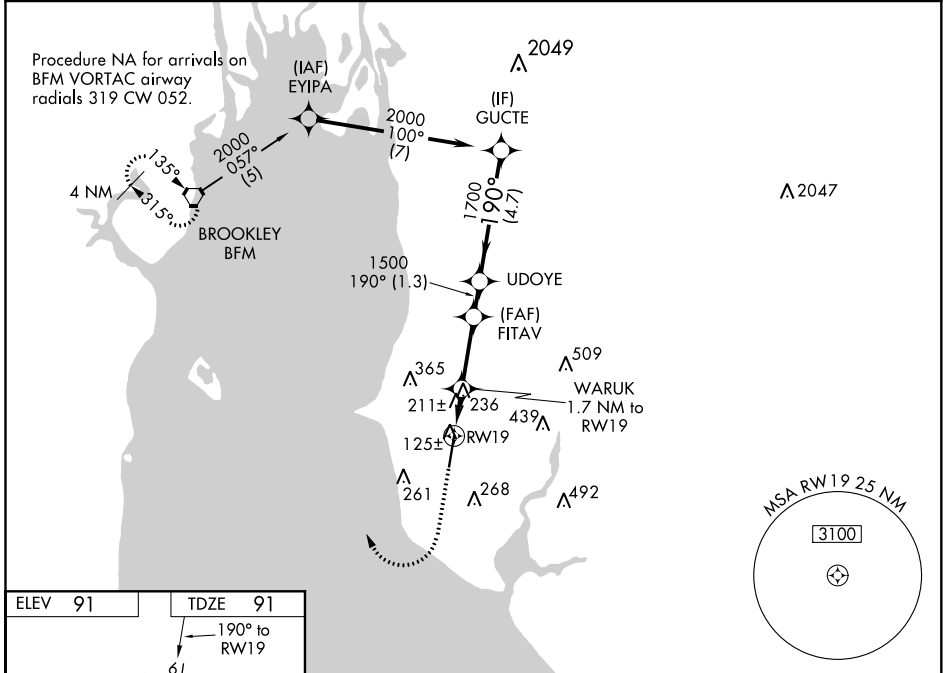

ELEV 91	TDZE 91					
1500	2000	BFM	GUCTE			
*LNAV only.		WARUK 1.7 NM to RW19	FITAV 1500	UDOYE	2000	
RW19		*1.2 NM to RW19	*660	1500	Procedure Turn NA	
		-1.2	-0.5	2.6	1.3 NM	4.7 NM
CATEGORY	A	B	C	D		
LPV DA	341-7/8		250 (300-7/8)			
LNAV/VNAV DA	513-1 1/2		422 (500-1 1/2)			
LNAV MDA	500-1	409 (500-1)	500-1 1/8	409 (500-1 1/8)		
CIRCLING	560-1	469 (500-1)	580-1 1/2 489 (500-1 1/2)	660-2 569 (600-2)		

SE-4, 10 SEP 2020 to 08 OCT 2020

SE-4, 10 SEP 2020 to 08 OCT 2020