SALT LAKE FOUR DEPARTURE

(SLC4.TCH) 17AUG17

SALT LAKE CITY, UTAH

SALT LAKE CITY INTL (SLC)

D-ATIS
124.75 125.625
CLNC DEL
127.3 379.975
CPDLC
SALT LAKE CITY DEP CON
128.6 322.3

TOP ALTITUDE: 10000

NOTE: RADAR required.
NOTE: This is a RADAR vector departure to assigned route or fix.

TAKEOFF MINIMUMS
Rwys 14, 16R, 16L, 17: Assigned heading 163°, standard with minimum climb of 260′ per NM to 6000. Assigned heading 283° CW 343°, standard with minimum climb of 400′ per NM to 8300.
Rwy 32: Assigned heading 263° CW 343° standard with minimum climb of 498′ per NM to 7800 or 400-1 with minimum climb of 260′ per NM to 7800.
Rwys 34L, 34R, 35: Assigned heading 263° CW 322°, standard with minimum climb of 260′ per NM to 7800. Assigned heading 323° CW 343°, standard with minimum climb of 260′ per NM to 7800.

(NARRATIVE ON FOLLOWING PAGE)

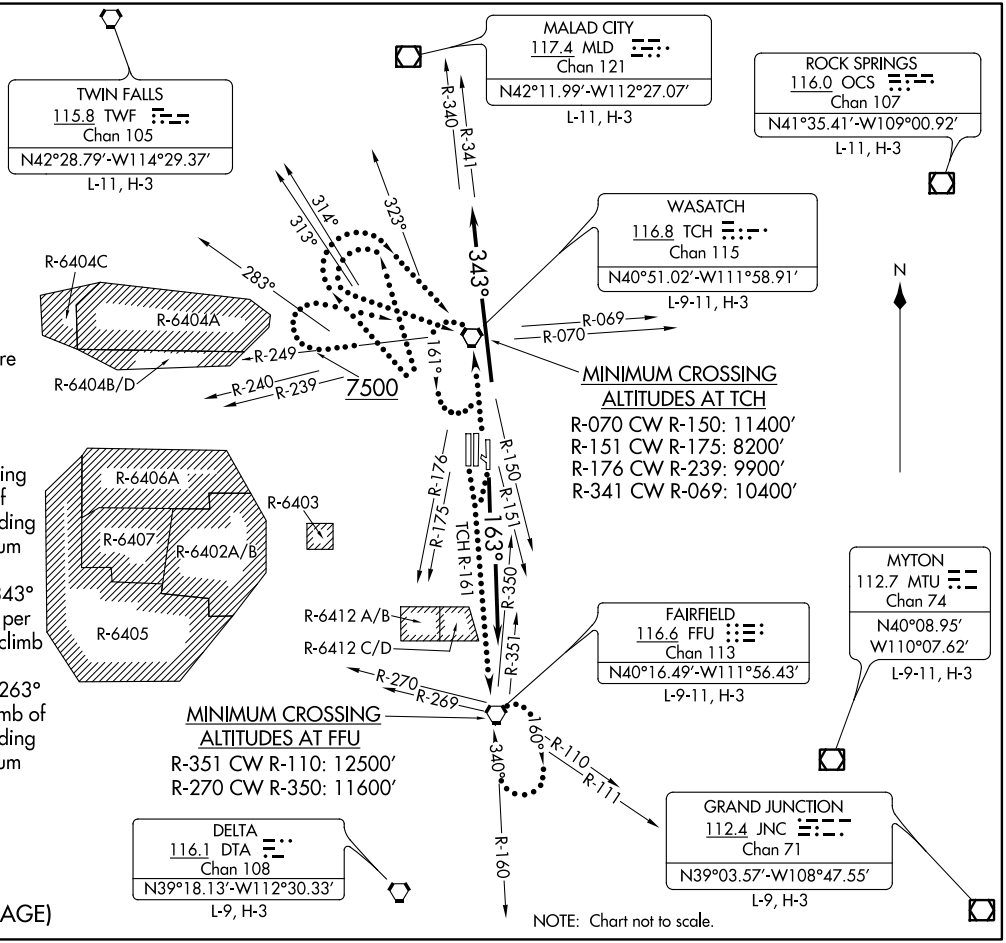

(SLC4.TCH) 19283

SALT LAKE FOUR DEPARTURE

AL-365 (FAA)

SALT LAKE CITY INTL (SLC)

SALT LAKE CITY, UTAH