MUCKY TWO DEPARTURE(RNAV)

ATIS ★
120.825
CLNC DEL (When twr closed)
121.35
GND CON
120.125
SAN MARCOS TOWER ★
126.825
AUSTIN DEP CON
119.0 370.85

TOP ALTITUDE: ASSIGNED BY ATC

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV-1.

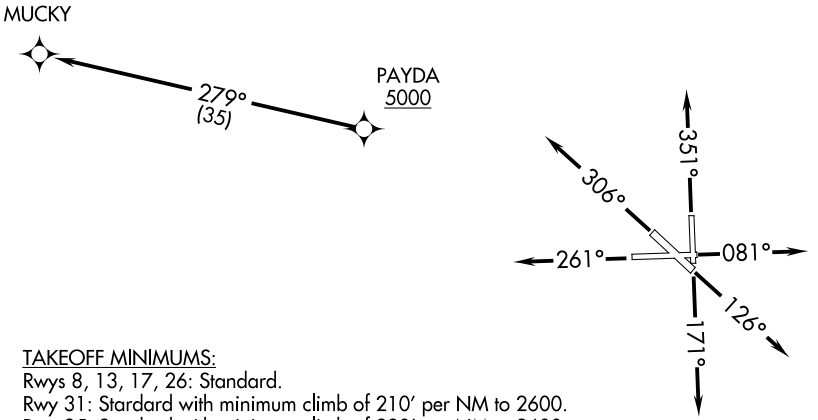

TAKEOFF MINIMUMS:
Rwys 8, 13, 17, 26: Standard.
Rwy 31: Stardard with minimum climb of 210′ per NM to 2600.
Rwy 35: Stardard with minimum climb of 230′ per NM to 2600.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 8: Climb heading 081° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....
TAKEOFF RWY 13: Climb heading 126° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....
TAKEOFF RWY 17: Climb heading 171° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....
TAKEOFF RWY 26: Climb heading 261° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....
TAKEOFF RWY 31: Climb heading 306° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....
TAKEOFF RWY 35: Climb heading 351° or as assigned by ATC for RADAR vectors to PAYDA at of above 5000, thence....

. . . .on track 279° to MUCKY. Maintain altitude assigned by ATC. Expect filed altitude 10 minutes after departure.

SC-3, 08 OCT 2020 to 05 NOV 2020