WAAS CH 65609 W14A	APP CRS 146°	Rwy ldg 6329 TDZE 2586 Apt Elev 2596

RNAV (GPS) RWY 14
DODGE CITY RGNL (DDC)

A
-20°C

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). For inop ALS, increase LPV all Cats visibility to ⅞ SM and LNAV/VNAV all Cats visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 4600 direct CORKU and hold.

ASOS	KANSAS CITY CENTER	UNICOM
118.525	125.2 269.4	122.7 (CTAF) L

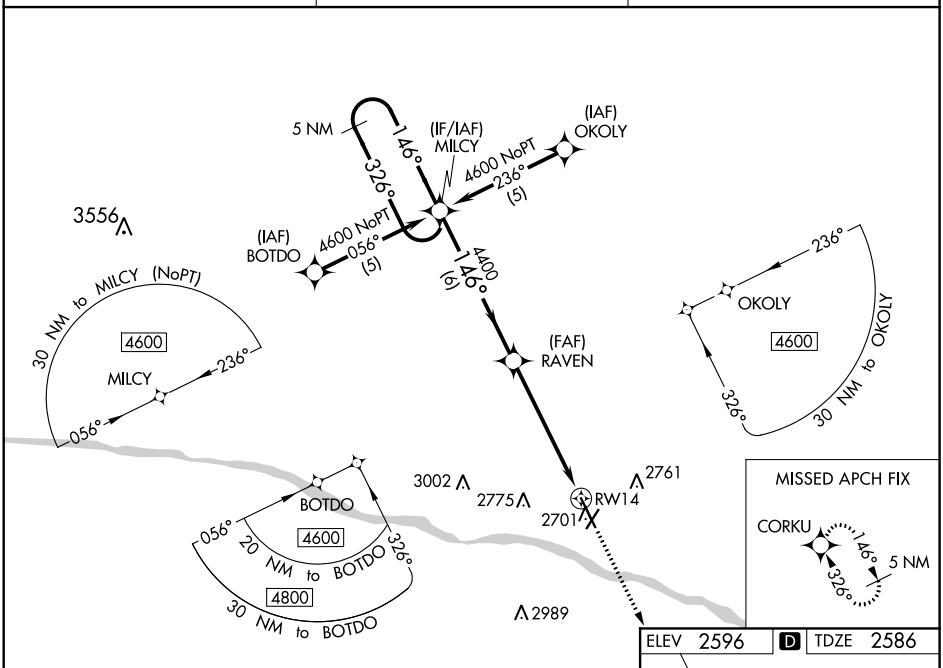

ELEV 2596 D TDZE 2586

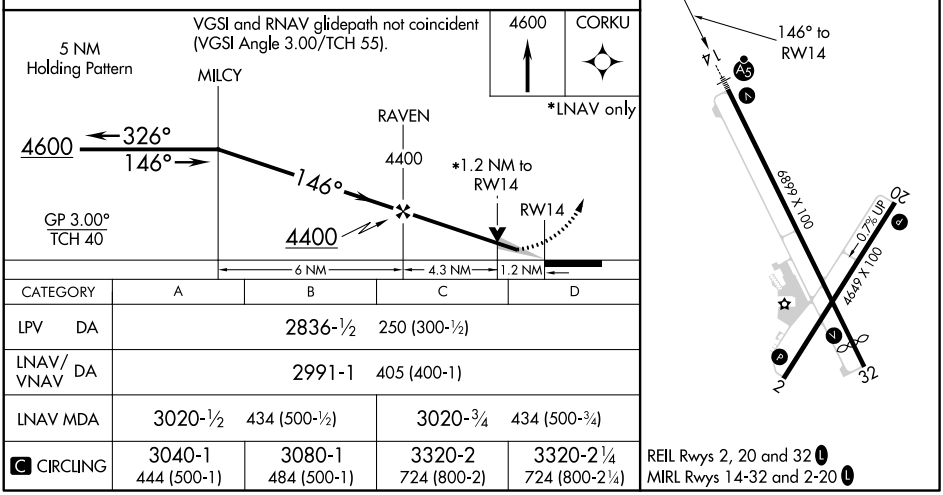

CATEGORY	A	B	C	D
LPV DA	2836-½ 250 (300-½)			
LNAV/VNAV DA	2991-1 405 (400-1)			
LNAV MDA	3020-½ 434 (500-½)		3020-¾ 434 (500-¾)	
C CIRCLING	3040-1 444 (500-1)	3080-1 484 (500-1)	3320-2 724 (800-2)	3320-2¼ 724 (800-2¼)

REIL Rwys 2, 20 and 32 L
MIRL Rwys 14-32 and 2-20 L

NC-2, 08 OCT 2020 to 05 NOV 2020

NC-2, 08 OCT 2020 to 05 NOV 2020