


CHARLIE FIVE DEPARTURE

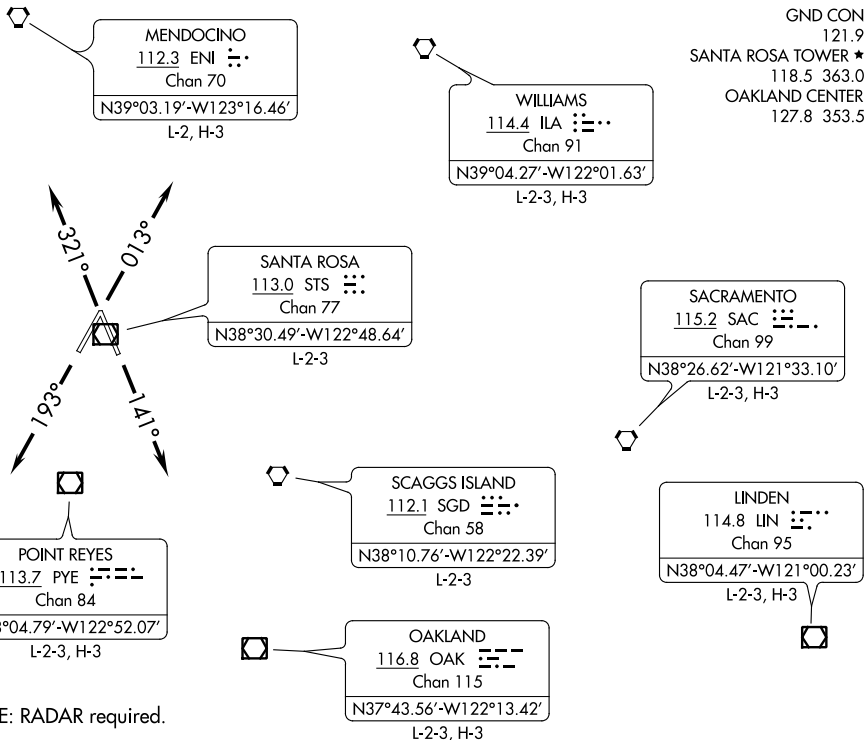

NOTE: RADAR required.

TAKEOFF MINIMUMS

- Rwy 2: Standard with minimum climb of 470' per NM to 6000.
- Rwy 14: Standard with minimum climb of 298' per NM to 5600.
- Rwy 20: Standard with minimum climb of 408' per NM to 5600.
- Rwy 32: Standard with minimum climb of 391' per NM to 7000.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2: Climb heading 013° (or assigned heading 295° CW 325° or 130° CW 190°), thence

TAKEOFF RUNWAY 14: Climb heading 141° (or assigned heading 295° CW 320° or 130° CW 220°), thence

TAKEOFF RUNWAY 20: Climb heading 193° (or assigned heading 295° CW 325° or 130° CW 220°), thence

TAKEOFF RUNWAY 32: Climb heading 321° (or assigned heading 295° CW 325° or 141° CW 220°), thence

. . . . expect RADAR vectors to join assigned route. Maintain assigned altitude; expect filed altitude/flight level ten minutes after departure.

LOST COMMUNICATIONS: If not in contact with Oakland Center after reaching 4000, proceed direct to the PYE VOR/DME. Thence via assigned route.

CHARLIE FIVE DEPARTURE

SW-2, 08 OCT 2020 to 05 NOV 2020

SW-2, 08 OCT 2020 to 05 NOV 2020