REDSTONE ARSENAL, ALABAMA

RNAV (GPS) RWY 17

WAAS CH **45638** **W17A**	APCH CRS **173°**	Rwy ldg **7297** TDZE **685** Arpt Elev **685**

AL-703 (USA)

REDSTONE AAF (KHUA)

T A * When ALS inop, increase CAT E vis to 1 1/2 miles.
** When ALS inop, increase CAT CDE vis to 1 3/8 miles.
*** Circling not authorized E of Rwy 17-35.

MALSR A5

MISSED APPROACH: Climb to 3000 direct FASOV and hold.

ATIS	HUNTSVILLE APP CON/DEP CON	TOWER*	ASR/PAR
120.65	**118.05 239.0** W **125.6 354.1** E	**126.95** (CTAF) L **290.275**	

DME/DME RNP -0.3 NA

Visibility reduction by helicopters below 1 SM NA.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F).

INOPERATIVE TABLE does not apply to LPV all CAT and LNAV CAT AB.

Procedure NA for arrivals at TANNE on V54 west bound.

Procedure NA for arrivals on RQZ VORTAC radials R-261 CW R-010. This note applies to aircraft planning to fly the RQZ VORTAC feeder route.

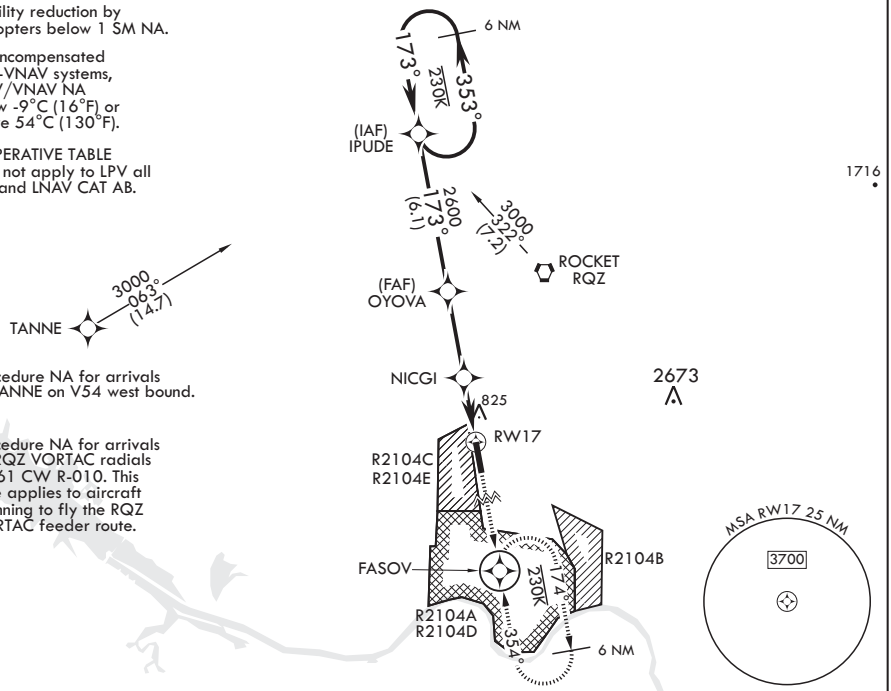

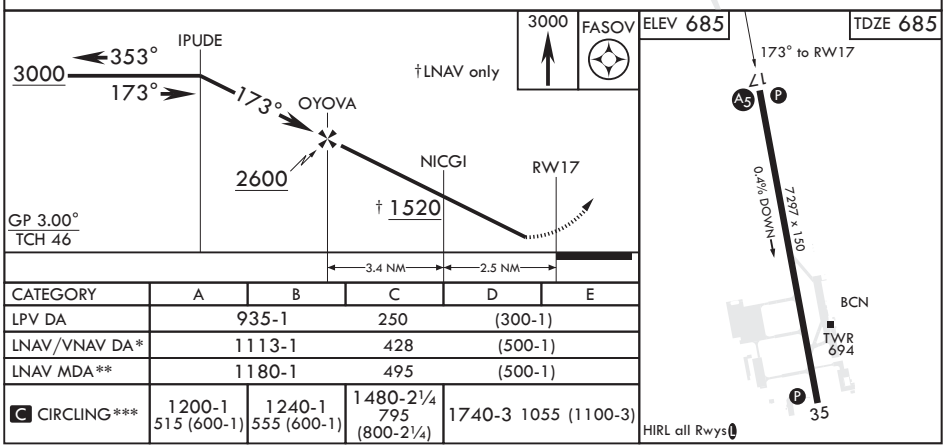

CATEGORY	A	B	C	D	E
LPV DA	935-1		250	(300-1)	
LNAV/VNAV DA*	1113-1		428	(500-1)	
LNAV MDA**	1180-1		495	(500-1)	
C CIRCLING***	1200-1 515 (600-1)	1240-1 555 (600-1)	1480-2¼ 795 (800-2¼)	1740-3 1055 (1100-3)	

SE-4, 08 OCT 2020 to 05 NOV 2020