WAAS CH 82334 W09A	APP CRS 085°	Rwy Idg 4005 TDZE 28 Apt Elev 28

RNAV (GPS) RWY 9

ORMOND BEACH MUNI (OMN)

RNP APCH.

Rwy 9 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C or above 54° C. VDP NA when using Daytona Beach altimeter setting.

MISSED APPROACH: Climb to 600 then climbing left turn to 2800 direct ARSUF and hold.

ATIS	DAYTONA APP CON	ORMOND BEACH TOWER★	GND CON	CLNC DEL	UNICOM
118.475	125.8 269.075	119.075 (CTAF) L	121.625	121.625	123.05

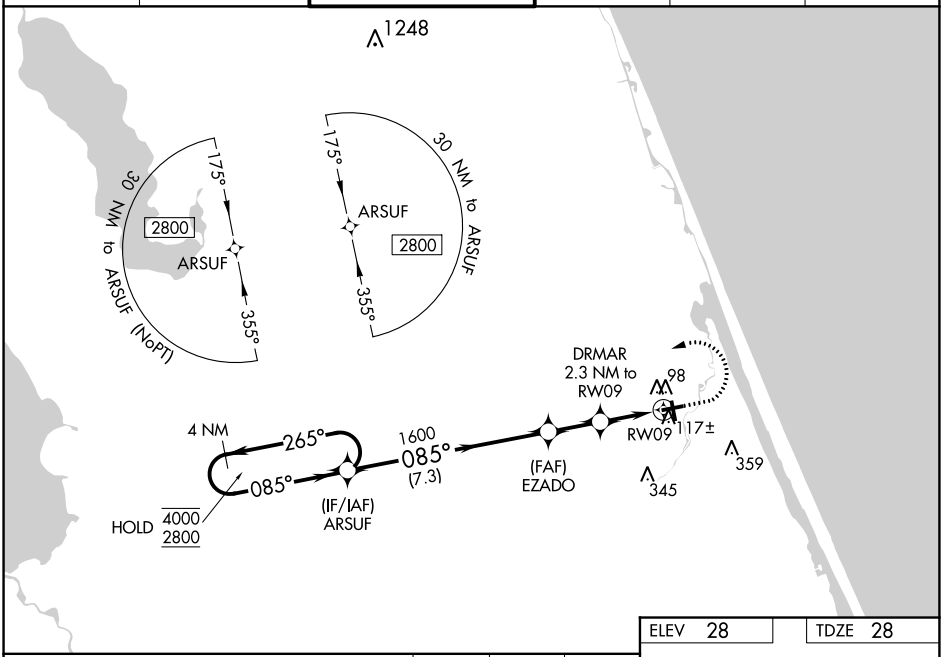

ELEV 28 TDZE 28

VGSI and RNAV glidepath not coincident (VGSI Angle 3.40/TCH 48).

600 2800 ARSUF

*LNAV only.

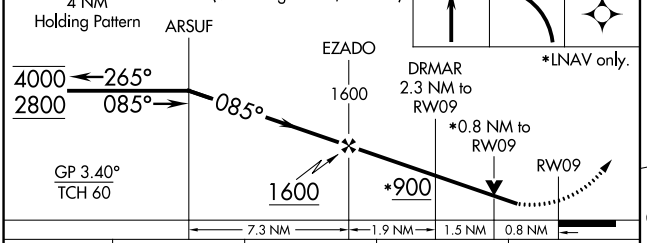

CATEGORY	A	B	C	D
LPV DA	313-1 285 (300-1)			NA
LNAV/VNAV DA	278-1 250 (300-1)			NA
LNAV MDA	380-1 352 (400-1)			NA
C CIRCLING	500-1 472 (500-1)		740-2 712 (800-2)	NA



REIL Rwys 9, 17, 27 and 35 L

MIRL Rwys 9-27 and 17-35 L

SE-3, 08 OCT 2020 to 05 NOV 2020
SE-3, 08 OCT 2020 to 05 NOV 2020