

WAAS CH 58336 W28B	APP CRS 276°	Rwy ldg TDZE Apt Elev	8000 65 65
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 28L

FORT LAUDERDALE/HOLLYWOOD INTL (FLL)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C (43°F) or above 54°C (130°F). Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS increase LNAV Cats C/D visibility to 1¼ SM. Inop table does not apply to LPV all Cats.

MALSF

MISSED APPROACH: Climb to 1000 then climbing left turn to 4000 direct GEGEY and hold, continue climb-in-hold to 4000.

D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4	CPDLC
------------------------	---------------------------------------	--	-------------------------	--------------------------	-------

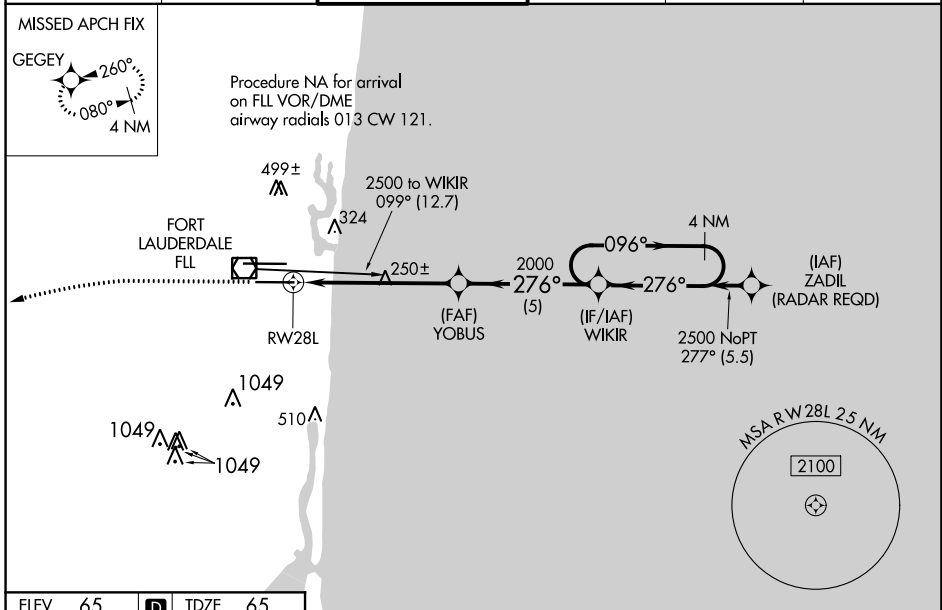


ELEV 65	D	TDZE 65
---------	----------	---------

1000 4000 GEGEY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 69).

*LNAV only.

GP 3.00° TCH 53



CATEGORY	A	B	C	D
LPV DA		265/40	200 (200-¾)	
LNAV/VNAV DA		389/40	324 (400-¾)	
LNAV MDA	500/40	435 (500-¾)	500/50	435 (500-1)
C CIRCLING	680-1	615 (700-1)	800-2 735 (700-2)	800-2¼ 735 (800-2¼)

SE-3, 03 DEC 2020 to 31 DEC 2020

SE-3, 03 DEC 2020 to 31 DEC 2020