

WAAS CH <b>99707</b> <b>W36A</b>	APP CRS <b>005°</b>	Rwy Idg TDZE Apt Elev	<b>5003</b> <b>979</b> <b>979</b>
--	------------------------	-----------------------------	---




# RNAV (GPS) RWY 36

WINCHESTER MUNI (BGF)

**NA** DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4°F) or above 54° C (130°F). Baro-VNAV and LNAV NA when using Chattanooga altimeter setting. When local altimeter setting not received, use Chattanooga altimeter setting and increase LPV DA to 1503, LNAV/VNAV DA to 1530 and all MDA 160 feet. Increase LPV and LNAV/VNAV visibility ½ mile all Cats. Increase circling visibility ½ mile Cat C. VDP NA when using Chattanooga altimeter setting.

**MISSED APPROACH:**  
Climb to 4000 direct ZEDUX and hold.

<b>AWOS-3</b> <b>121.675</b>	<b>MEMPHIS CENTER</b> <b>128.15 323.125</b>	<b>GCO</b> <b>121.725</b>	<b>UNICOM</b> <b>122.8 (CTAF)</b>
---------------------------------	--	------------------------------	--------------------------------------

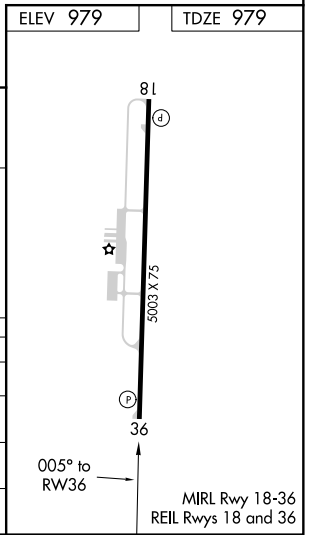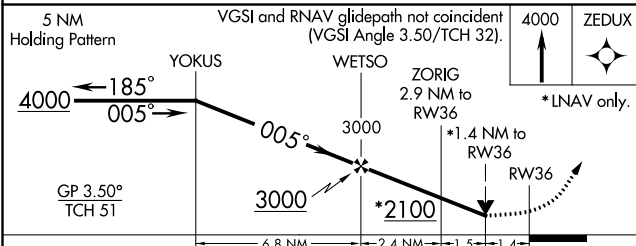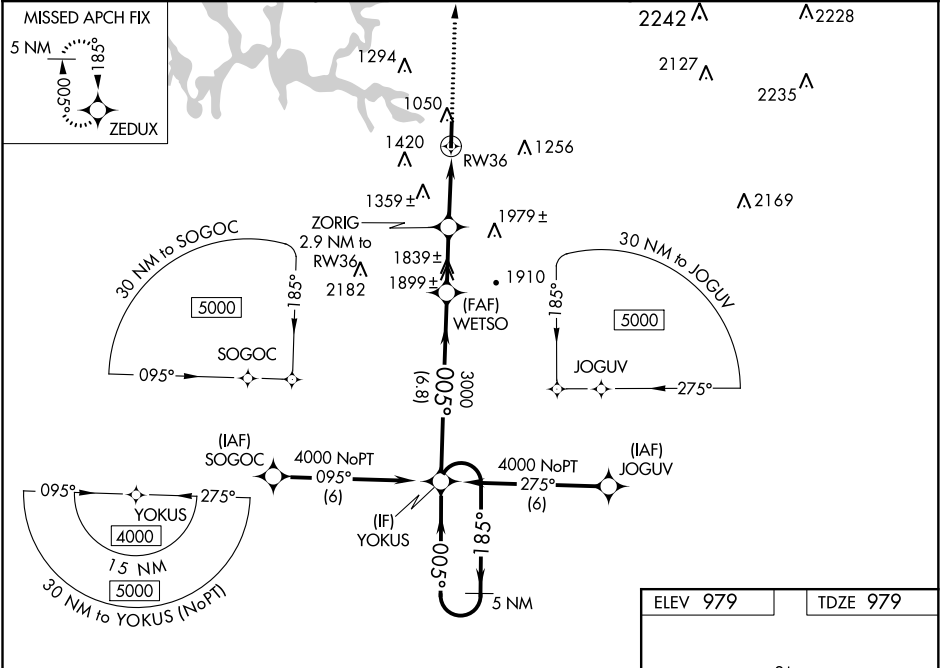

CATEGORY	A	B	C	D
LPV DA	1340-1	361 (400-1)		NA
LNAV/VNAV DA	1367-1 ¼	388 (400-1 ¼)		NA
LNAV MDA	1540-1	561 (600-1)	1540-1 ½ 561 (600-1 ½)	NA
CIRCLING	1540-1	561 (600-1)	1540-1 ½ 561 (600-1 ½)	NA

SE-1, 31 DEC 2020 to 28 JAN 2021

SE-1, 31 DEC 2020 to 28 JAN 2021