

(BLTWY6.BLTWY) 19115

AL-5757 (FAA)

BAYTOWN (HPY)  
BAYTOWN, TEXAS

# BLTWY SIX DEPARTURE (RNAV)


CTAF  
122.8  
HOUSTON DEP CON  
134.45 284.0

**TOP ALTITUDE:  
ASSIGNED BY ATC**

NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: RNAV 1.

### TAKEOFF MINIMUMS

Rwy 14, 32: Standard with minimum climb  
of 500' per NM to 540.

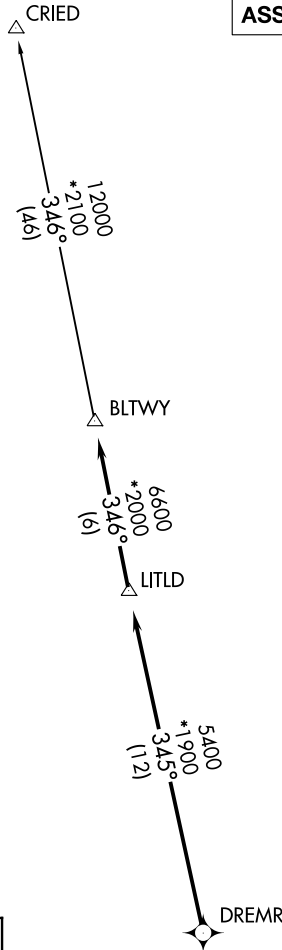

### DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 14: Climb heading 140° to 540 for RADAR vectors to DREMR, then . . .

TAKEOFF RWY 32: Climb heading 320° to 540 for RADAR vectors to DREMR, then . . .

...on track 345° to LITLD, then on track 346° to BLTWY, then on (transition). Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

CRIED TRANSITION (BLTWY6.CRIED)

NOTE: Chart not to scale.

# BLTWY SIX DEPARTURE (RNAV)

(BLTWY6.BLTWY) 25APR19

BAYTOWN, TEXAS  
BAYTOWN (HPY)

SC-5, 28 JAN 2021 to 25 FEB 2021

SC-5, 28 JAN 2021 to 25 FEB 2021