

| | | | |
|--|------------------------|-----------------------------|-------------------------------------|
| WAAS CH 73015 W05A | APP CRS 047° | Rwy ldg TDZE Apt Elev | 5000 8 8 |
|--|------------------------|-----------------------------|-------------------------------------|

RNAV (GPS) RWY 5


NAPLES MUNI (APF')

RNP APCH.

⚠ Baro-VNAV NA when using Southwest Florida Intl altimeter setting.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C.
 When local altimeter setting not received, use Southwest Florida Intl altimeter setting and increase all DA 56 feet and all MDA 60 feet, increase LPV, LNAV/VNAV all Cats and LNAV Cats C/D visibility ¼ mile.



MISSED APPROACH: Climb to 2100 direct OFDOY and hold.

| | | | | | |
|------------------------|--|--|-------------------------|--------------------------|---|
| ATIS 134.225 | FORT MYERS APP CON* 124.125 371.85 | NAPLES TOWER* 128.5 (CTAF) 0 | GND CON 121.6 | CLNC DEL 118.0 | CLNC DEL 124.125 (When twr closed) |
|------------------------|--|--|-------------------------|--------------------------|---|

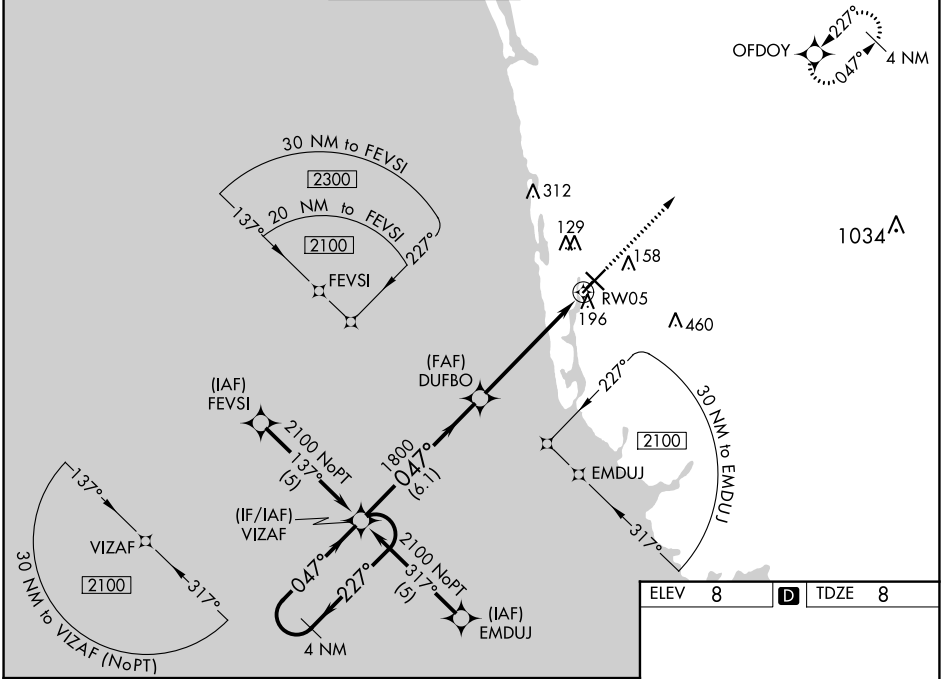

SE-3, 28 JAN 2021 to 25 FEB 2021

SE-3, 28 JAN 2021 to 25 FEB 2021

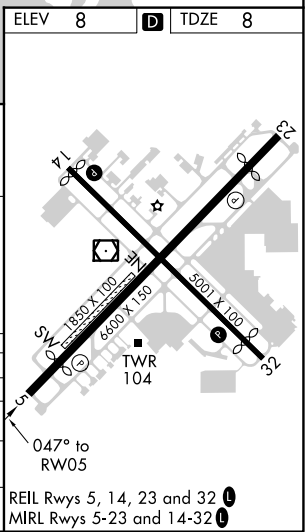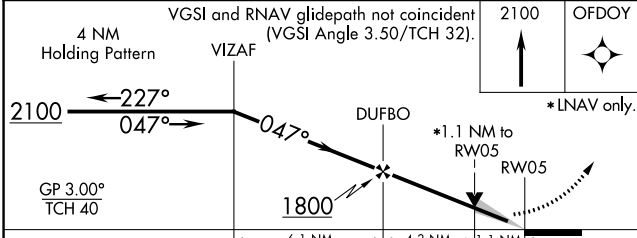

| CATEGORY | A | B | C | D |
|--------------|---------------------|-------------|------------------------|------------------------|
| LPV DA | 295-1 287 (300-1) | | | |
| LNAV/VNAV DA | 446-1½ 438 (500-1½) | | | |
| LNAV MDA | 460-1 | 452 (500-1) | 460-1⅜ 452 (500-1⅜) | 460-1½ 452 (500-1½) |
| CIRCLING | 500-1 | 492 (500-1) | 680-2 672 (700-2) | 820-2¾ 812 (900-2¾) |