RNAV (GPS) Y RWY 35R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

WAAS	APP CRS	Rwy Idg	7800
CH 70709	350°	TDZE	480
W35D		Apt Elev	501

RNP APCH.

Circling Rwy 11 NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.

ALSF-2

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 direct TORAC and hold.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL	CPDLC
118.725	132.075 327.0	124.2 257.8	121.7 348.6	126.1 275.8	

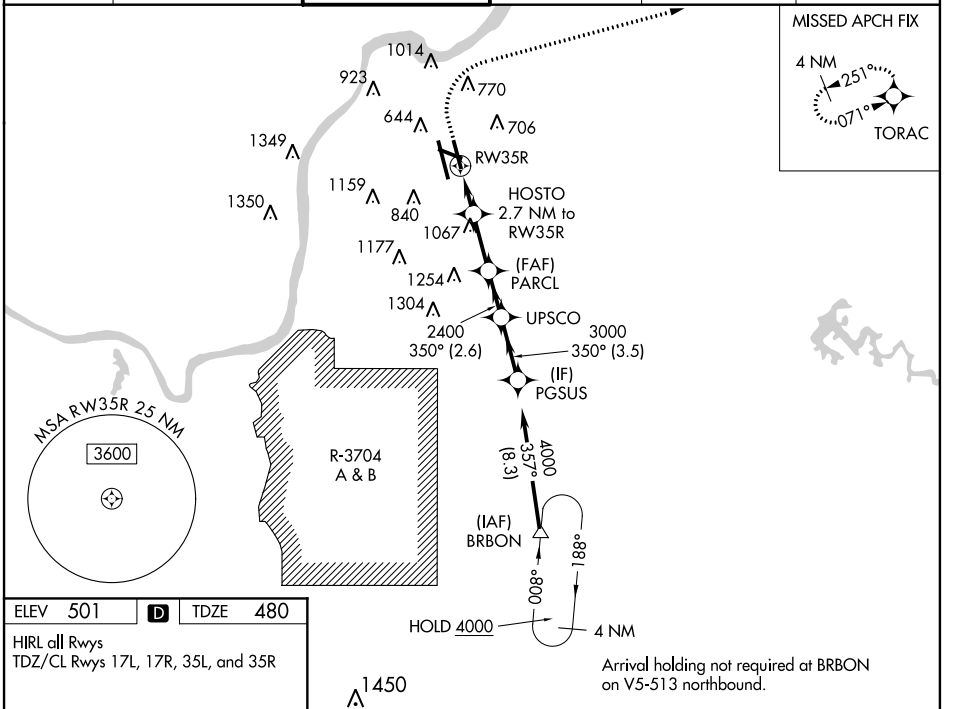

ELEV 501	D	TDZE 480

HIRL all Rwys
TDZ/CL Rwys 17L, 17R, 35L, and 35R

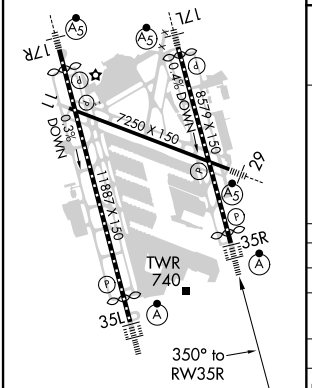

1450

1600 4000 TORAC

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).

*LNAV only.

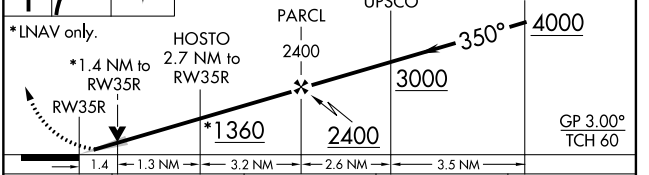

CATEGORY	A	B	C	D
LPV DA	680/18 200 (200-½)			
LNAV/VNAV DA	909/50 429 (500-1)			
LNAV MDA	1000/24 520 (500-½)		1000/55 520 (500-1)	
C CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

SE-1, 25 MAR 2021 to 22 APR 2021
SE-1, 25 MAR 2021 to 22 APR 2021