POTTR SIX DEPARTURE

(POTTR6.POTTR) 30APR15

MIAMI, FLORIDA

MIAMI INTL (MIA)

POTTR SIX DEPARTURE

(POTTR6.POTTR) 20254

MIAMI, FLORIDA

MIAMI INTL (MIA)

AL-257 (FAA)

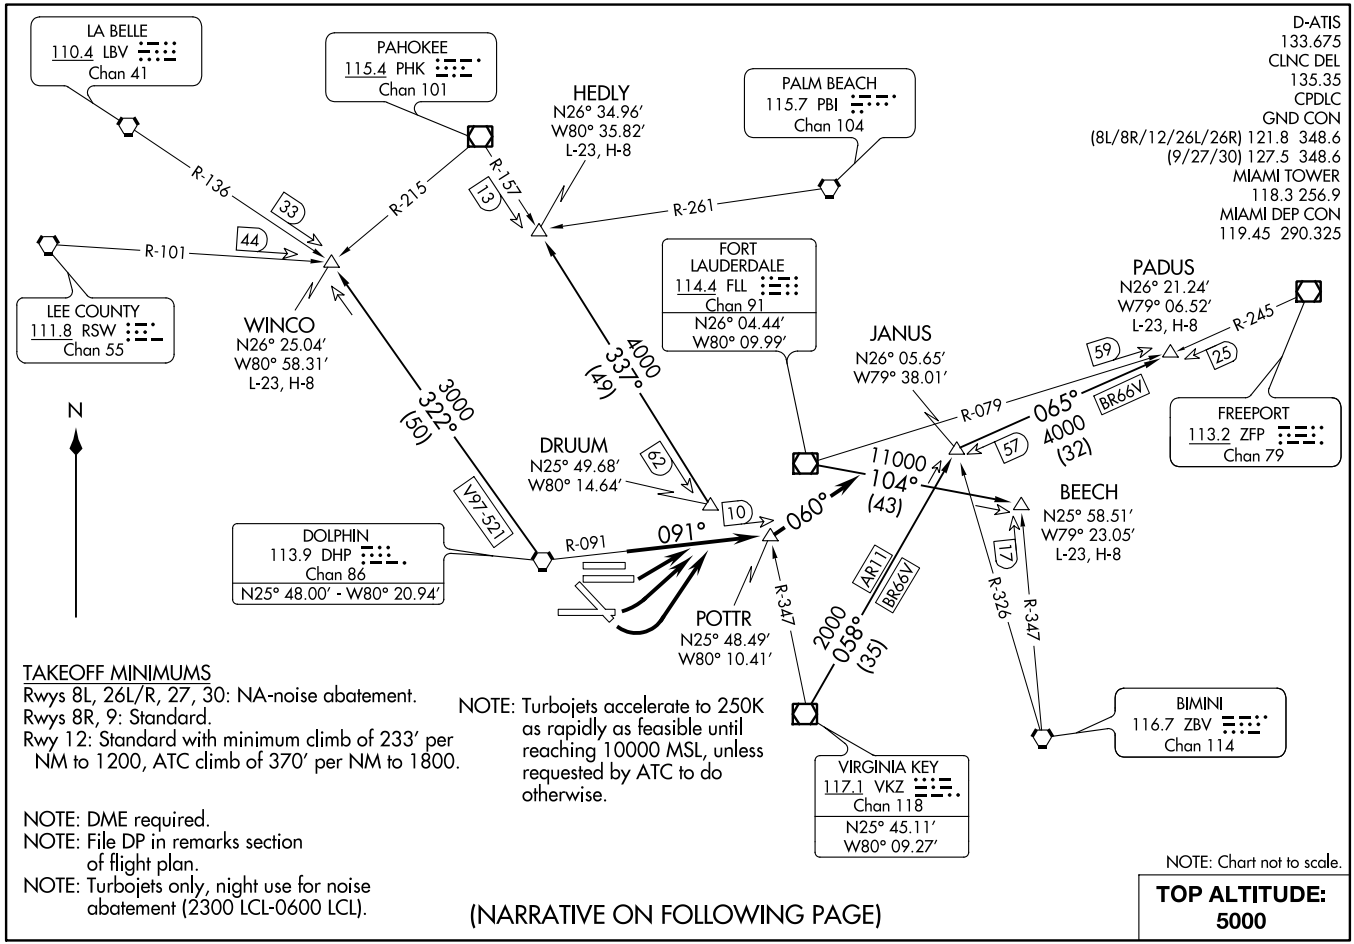

TAKEOFF MINIMUMS

Rwys 8L, 26L/R, 27, 30: NA-noise abatement.
Rwys 8R, 9: Standard.
Rwy 12: Standard with minimum climb of 233′ per NM to 1200, ATC climb of 370′ per NM to 1800.

NOTE: DME required.
NOTE: File DP in remarks section of flight plan.
NOTE: Turbojets only, night use for noise abatement (2300 LCL-0600 LCL).

NOTE: Turbojets accelerate to 250K as rapidly as feasible until reaching 10000 MSL, unless requested by ATC to do otherwise.

NOTE: Chart not to scale.

TOP ALTITUDE: 5000

(NARRATIVE ON FOLLOWING PAGE)