RNAV (RNP) Y RWY 27

MIAMI INTL (MIA)

APP CRS	Rwy Idg	12755
272°	TDZE	8
	Apt Elev	9

For uncompensated Baro-VNAV systems, procedure NA below 6°C (43°F) or above 54°C (130°F). GPS Required.
For inop MALSR, increase RNP 0.11 all Cats visibility to RVR 5000 and RNP 0.30 all Cats visibility to 1¼ mile.

MALSR

MISSED APPROACH: Climb to 2000 direct TUHWU and on track 342° to BRBRA and hold.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CLNC DEL	CPDLC
ARR 119.15 DEP 133.675	124.85 322.3	118.3 256.9	121.8 (8L/8R/12/26L/26R) 348.6 127.5 (9/27/30)	135.35	

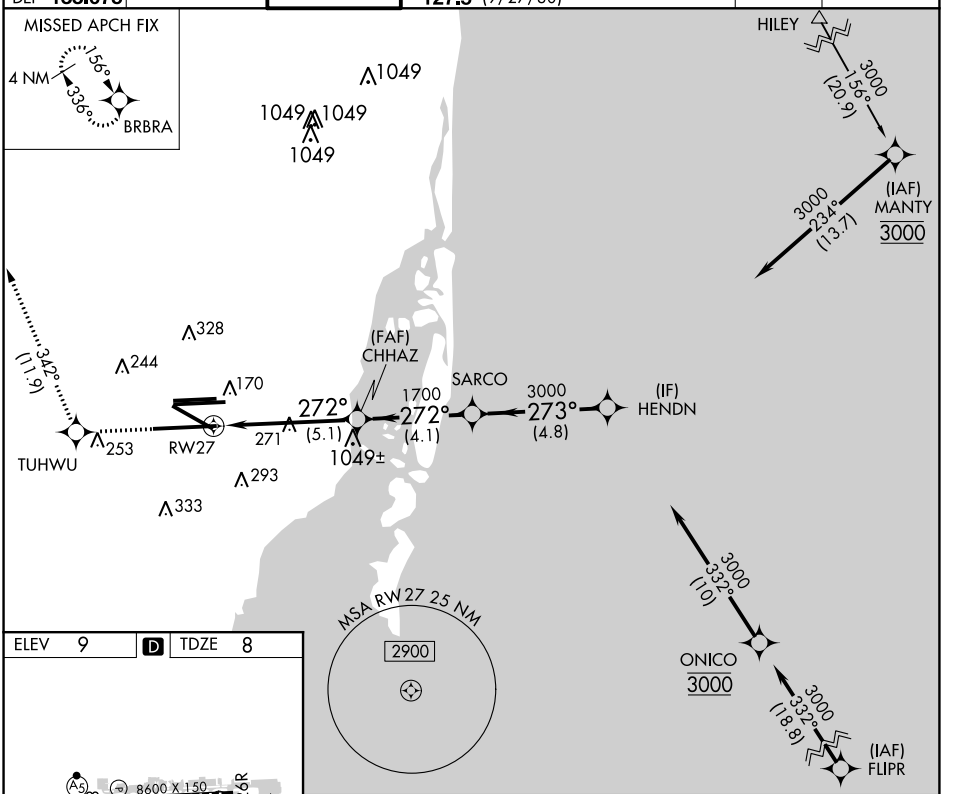

ELEV 9 D TDZE 8



TDZ/CL Rwy 8R
REIL Rwys 8L and 26R
HIRL all Rwys

2000	TUHWU	tr 342°	BRBRA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

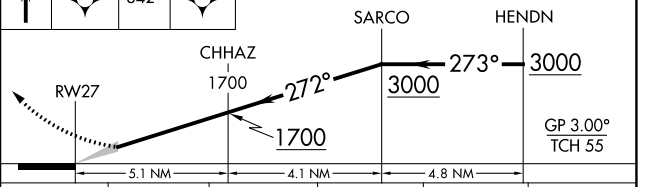

CATEGORY	A	B	C	D	E
RNP 0.11 DA	336/30 328 (400-⅝)				
RNP 0.30 DA	408/45 400 (400-⅞)				

AUTHORIZATION REQUIRED

SE-3, 25 MAR 2021 to 22 APR 2021
SE-3, 25 MAR 2021 to 22 APR 2021