

ZAAPA FIVE DEPARTURE (RNAV)

EC-2, 25 MAR 2021 to 22 APR 2021

AWOS-3
 119.950
 CLNC DEL
 121.85 (when tower closed)
 GND CON
 121.85
 COUNTY TOWER ★
 118.5 (CTAF)
 CLEVELAND DEP CON
 125.35 346.325

TOP ALTITUDE: ASSIGNED BY ATC

TAKEOFF MINIMUMS:



Rwys 6, 24: Standard with a minimum climb
 of 500' per NM to 1400.

NOTE: RADAR required.

NOTE: RNAV 1.

NOTE: DME/DME/IRU or GPS required.

NOTE: PUUDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

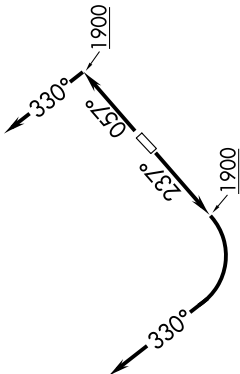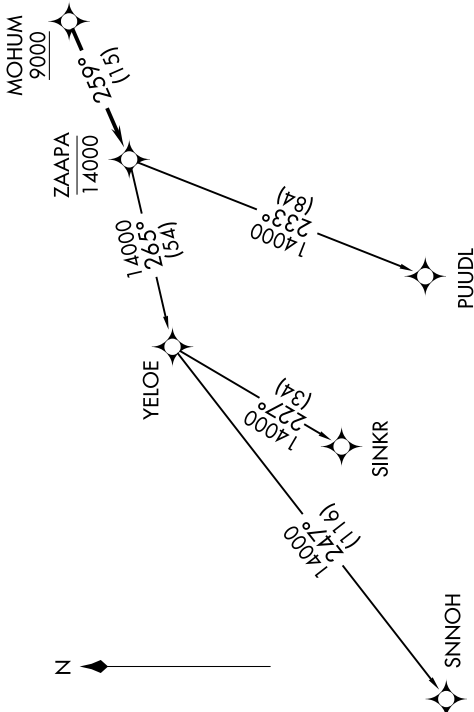

DEPARTURE ROUTE DESCRIPTION

▼ TAKEOFF RUNWAY 6: Climb on heading 057° to 1900, then on heading 330° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 24: Climb on heading 237° to 1900, then right turn heading 330° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

- PUUDL TRANSITION (ZAAPA5.PUUDL)
- SINKR TRANSITION (ZAAPA5.SINKR)
- SNINOH TRANSITION (ZAAPA5.SNINOH)

ZAAPA FIVE DEPARTURE (RNAV)

(ZAAPA5.ZAAPA) 26MAR20

EC-2, 25 MAR 2021 to 22 APR 2021