

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 93900 W35A | APP CRS 353° | Rwy Idg TDZE Apt Elev | 5364 650 658 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 35


NEW BRAUNFELS RGNL (BAZ)

RNP APCH.

When local altimeter setting not received, use San Marcos Rgnl altimeter setting; increase LPV DA to 972 feet, LNAV/VNAV DA to 1153 feet; increase all MDAs 60 feet and visibility LNAV Cat C and D ¼ SM. Baro-VNAV and VDP NA when using San Marcos Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F).


MISSED APPROACH: Climb to 3100 direct FONEK and via 340° track to BRAUN and hold, continue climb-in-hold to 3100.

| | | | | | | |
|------------------------|--|--|---------------------------|---------------------------|------------------------|-----------------------|
| ATIS 119.325 | SAN ANTONIO APP CON 124.45 335.625 | NEW BRAUNFELS TOWER * 127.05 285.4 | GND CON 120.175 | CLNC DEL 134.75 | UNICOM 122.7 | CTAF 127.05 |
|------------------------|--|--|---------------------------|---------------------------|------------------------|-----------------------|

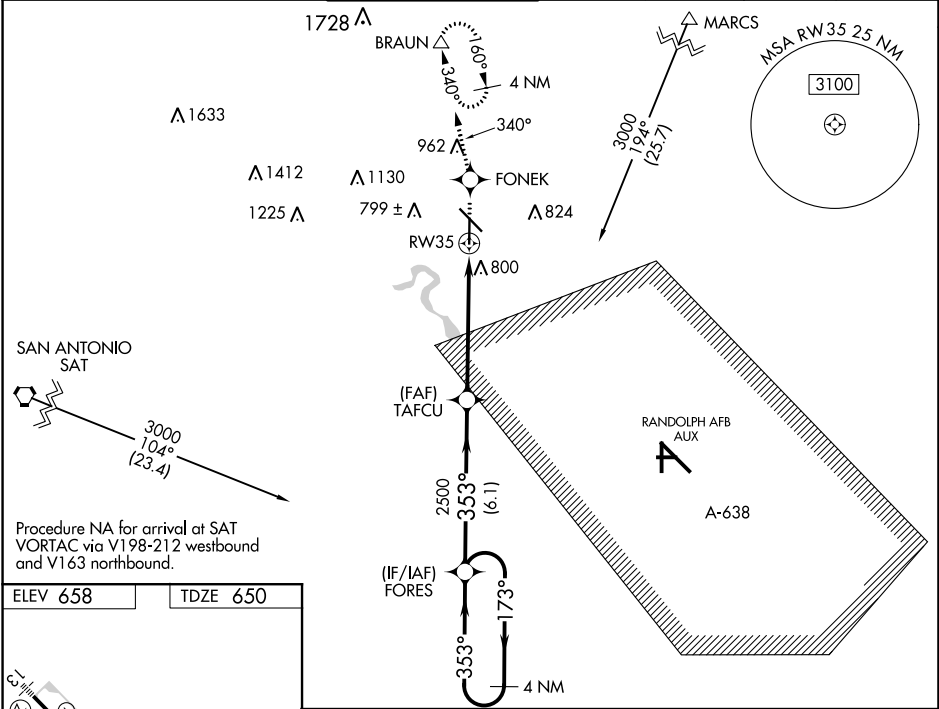

SC-3, 25 MAR 2021 to 22 APR 2021

SC-3, 25 MAR 2021 to 22 APR 2021

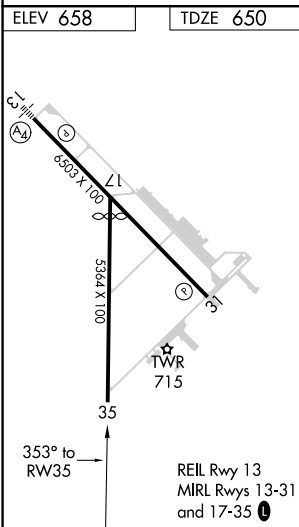

| | | | | | |
|----------------------|---------|-------------|------------------|--------------|-------|
| 4 NM Holding Pattern | | FORES | 3100 | FONEK | BRAUN |
| 3000 | | ← 173° | ↑ | ⊙ | △ |
| → 353° | | 353° | *LNAV only. | | |
| GP 3.00° | | TAFCU | *1.4 NM to RWY35 | | |
| TCH 45 | | 2500 | RWY35 | | |
| | | ← 6.1 NM | ← 4.2 NM | ← 1.4 NM | |
| CATEGORY | A | B | C | D | |
| LPV DA | 929-1 | | 279 (300-1) | | |
| LNAV/VNAV DA | 1110-1¾ | | 460 (500-1¾) | | |
| LNAV MDA | 1140-1 | 490 (500-1) | 1140-1⅜ | 1140-1½ | |
| | | | 490 (500-1⅜) | 490 (500-1½) | |