LOC/DME I-TUS	APP CRS	Rwy Idg	10996
111.7	123°	TDZE	2599
Chan 54		Apt Elev	2643

ILS or LOC RWY 11L
TUCSON INTL (TUS)

ADF or RADAR required for arrivals at DINGO.
ADF or DME required.
DME required for arrivals at SSAND.

T For inop ALS, increase S-ILS Cat E visibility to RVR 4000, S-LOC 11L Cat E visibility to 2½ SM; PARCS FIX MINIMUMS: S-LOC 11L Cat C/D/E visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 4000 then climbing right turn to 6000 on heading 300° and TUS VORTAC R-270 to RYN NDB/TUS 12.8 DME and hold.

ATIS	TUCSON APP CON	TUCSON TOWER	GND CON	CLNC DEL
123.8 279.65	119.4 318.1	118.3 257.8	124.4 348.6	126.65 326.2

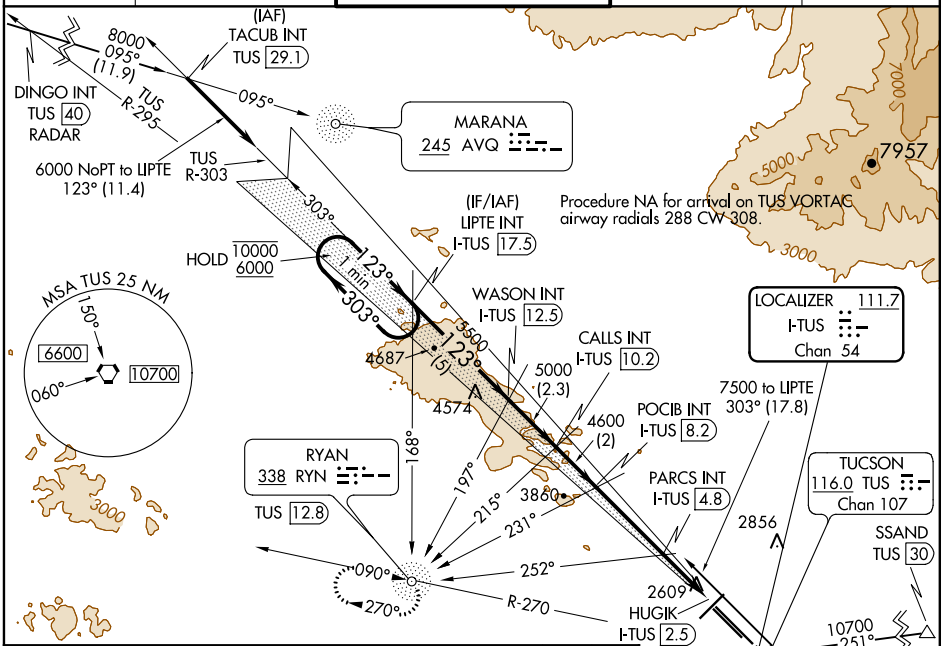

Use I-TUS DME when on the localizer course.

One Minute Holding Pattern

4000 6000 hdg 300° TUS R-270 RYN

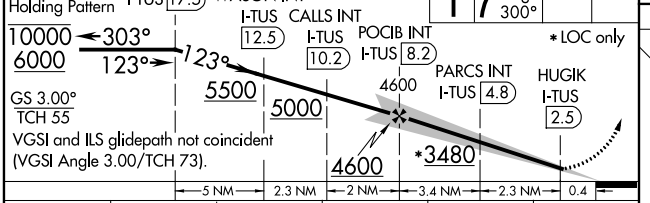

CATEGORY	A	B	C	D	E
S-ILS 11L	2800/24 201 (200-½)				
S-LOC 11L	3480/40 881 (900-¾)		3480-2 881 (900-2)		
CIRCLING	3480-1¼ 837 (900-1¼)		3480-2½ 837 (900-2½)	3480-2¾ 837 (900-2¾)	3800-3 1157(1200-3)
PARCS FIX MINIMUMS					
S-LOC 11L	2960/24 361 (400-½)		2960/40 361 (400-¾)		
CIRCLING	3160-1 517 (600-1)	3220-1 577 (600-1)	3220-1½ 577 (600-1½)	3220-2 577 (600-2)	3800-3 1157(1200-3)

ELEV 2643 D TDZE 2599

123° 6.1 NM from FAF



HIRL Rwy 11L-29R
MIRL Rwys 3-21 and 11R-29L
REIL Rwys 21, 29L and 29R

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

SW-4, 22 APR 2021 to 20 MAY 2021
SW-4, 22 APR 2021 to 20 MAY 2021