

WAAS CH 49127 W30A	APP CRS 300°	Rwy Idg TDZE 679 Apt Elev 682	6799
--	------------------------	---	-------------

RNAV (GPS) RWY 30


DECATUR (DEC)

RNP APCH.



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
 ▲ When local altimeter setting not received, use Lincoln altimeter setting and increase all DA/MDA 80 feet, increase LNAV Cat C/D and Circling Cat C/D visibility ¼ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting.

MISSED APPROACH:
 Climb to 3000 direct YENVU and hold.

ATIS 126.35	CHAMPAIGN APP CON* 132.85 290.225	DECATUR TOWER* 118.9 (CTAF) 0 291.775	GND CON 121.75 291.775	UNICOM 122.95
-----------------------	---	---	----------------------------------	-------------------------

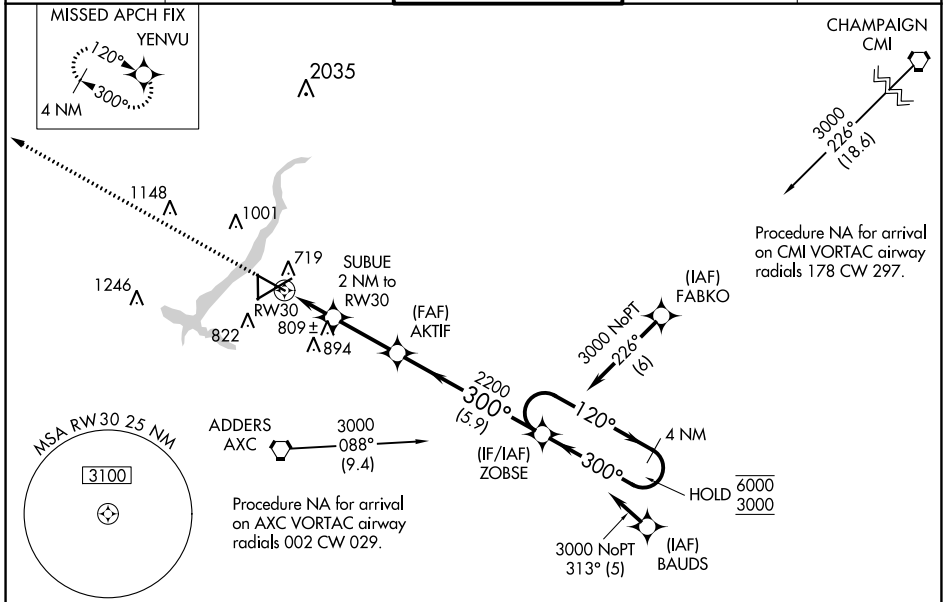

ELEV 682	D	TDZE 679
-----------------	----------	-----------------

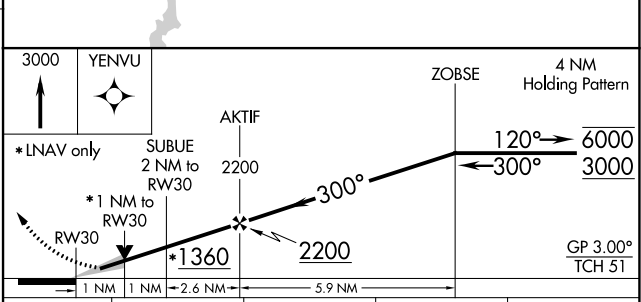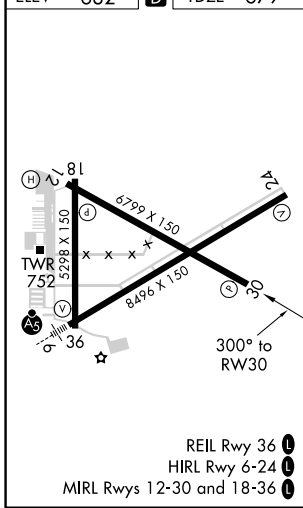

CATEGORY	A	B	C	D
LPV DA		879-1	200 (200-1)	
LNAV/VNAV DA		929-1	250 (300-1)	
LNAV MDA	1060-1	381 (400-1)	1060-1½	381 (400-1½)
C CIRCLING	1140-1 458 (500-1)	1240-1 558 (600-1)	1360-2 678 (700-2)	1360-2¼ 678 (700-2¼)

EC-3, 17 JUN 2021 to 15 JUL 2021

EC-3, 17 JUN 2021 to 15 JUL 2021