

LOC I-MQJ 108.7	APP CRS 252°	Rwy Idg TDZE Apt Elev	6005 860 862
---------------------------	------------------------	-----------------------------	---



ILS or LOC RWY 25

INDIANAPOLIS RGNL (MQJ)

▽ When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, increase S-LOC 25 Cats C/D visibility 1/8 mile and Circling Cat D visibility 1/4 mile.

MALSRL
AS
MISSED APPROACH: Climb to 1400 then climbing left turn to 2400 on SHB VOR/DME R-334 to SHB VOR/DME and hold.

AWOS-3 124.175	INDIANAPOLIS APP CON 127.15 317.8	CLNC DEL 119.25	UNICOM 122.975 (CTAF)
--------------------------	---	---------------------------	---------------------------------

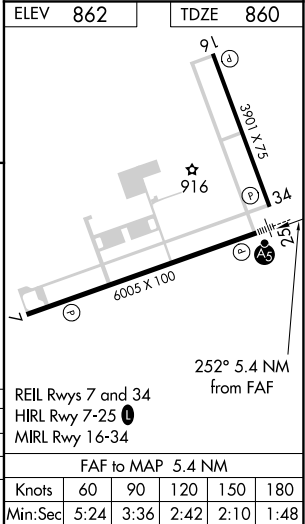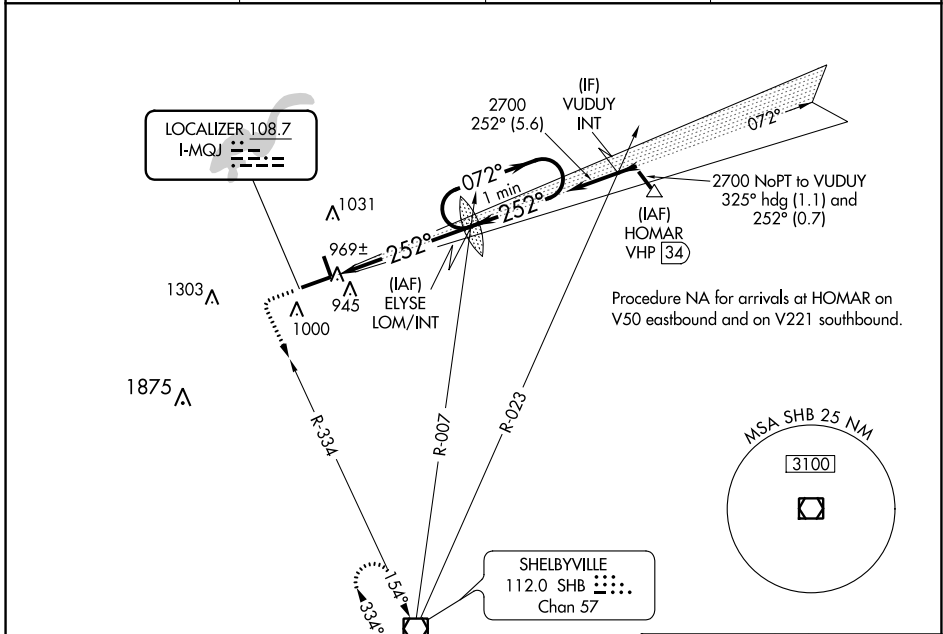

ELEV 862	TDZE 860	
1400	2400	SHB
↑	SHB R-334	
ELYSE LOM/INT		
2660		
One Minute Holding Pattern		
072° →		
← 252°		
2700		
GS 3.00°		
TCH 53		
5.4 NM		

CATEGORY	A	B	C	D
S-ILS 25	1060-1/2 200 (200-1/2)			
S-LOC 25	1220-1/2	360 (400-1/2)	1220-5/8	360 (400-5/8)
CIRCLING	1340-1	478 (500-1)	1360-1/2	1660-2/2
			498 (500-1/2)	798 (800-2/2)

FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

EC-2, 17 JUN 2021 to 15 JUL 2021

EC-2, 17 JUN 2021 to 15 JUL 2021