


WAAS CH 90106 W12A	APP CRS 126°	Rwy Idg 8587	12R 8831
		TDZE 46	44
		Apt Elev 62	62


RNAV (GPS) Y RWY 12R

NORMAN Y MINETA SAN JOSE INTL (SJC)

<p>▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0, 3 NA. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1 mile and LNAV Cats C/D visibility to 1½ mile.</p>		<p>MALSR Rwy 12R</p>	<p>MISSED APPROACH: Climb to 4600 direct HIWAK and on track 124° to GILRO and hold.</p>		
D-ATIS 126.95	NORCAL APP CON 120.1 290.25	SAN JOSE TOWER ★ 124.0 (CTAF) 257.6	GND CON 121.7	CLNC DEL 118.0	UNICOM 122.95

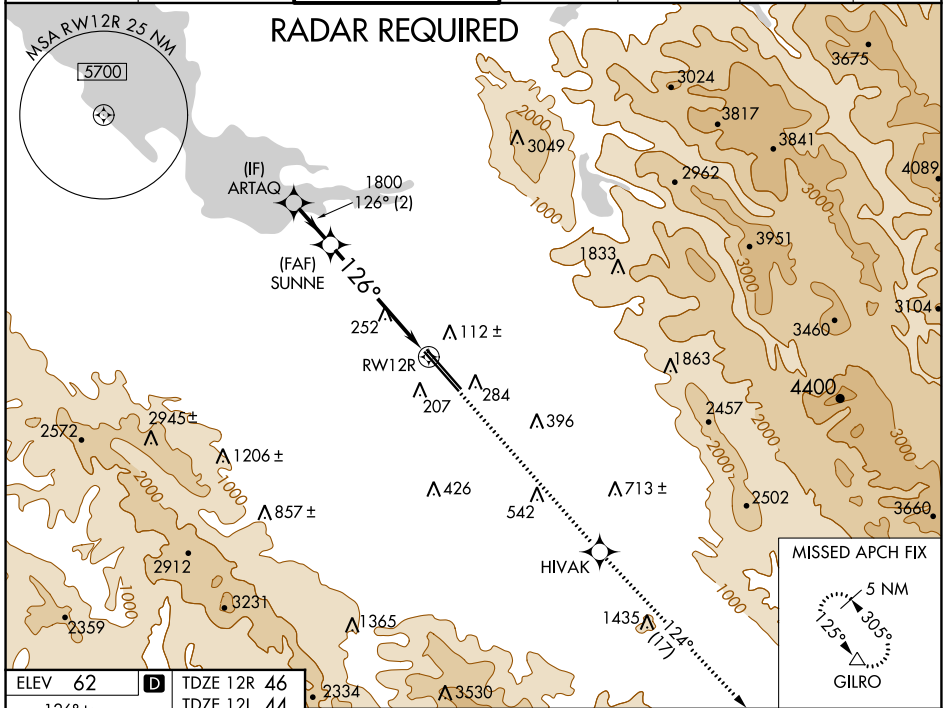

ELEV 62	TDZE 12R 46
	TDZE 12L 44

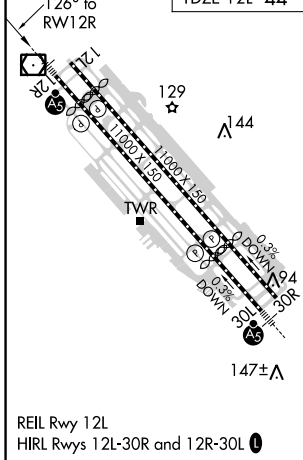

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

GP 3.00° TCH 58	ARTAQ	SUNNE	4600	HIWAK	tr 124°	GILRO
	1800	1800				
	2 NM	4.1 NM	1.3 NM			
CATEGORY	A	B	C	D		
LPV DA	246-½		200 (200-½)			
LNAV/VNAV DA	371-5/8 325 (400-5/8)		371-1 325 (400-1)			
LNAV MDA	520-½ 474 (500-½)		520-1 474 (500-1)			
SIDESTEP 12L	520-1 476 (500-1)		520-1½ 476 (500-1½)		520-2 476 (500-2)	

*LNAV only

SW-2, 04 NOV 2021 to 02 DEC 2021

SW-2, 04 NOV 2021 to 02 DEC 2021