LOC I-LOW	APP CRS	Rwy Idg	8400
110.7	012°	TDZE	6649
		Apt Elev	6649

ILS or LOC RWY 1

YELLOWSTONE (WYS)

ADF required. DME required for MUPDE stepdown fix.

T Obtain local altimeter setting on CTAF, when not received procedure
A NA NA. Inoperative table does not apply to S-LOC 1 Cat A. For
-20°C inoperative MALSR, increase S-ILS 1 all Cats visibility to 2¾ mile.

MALSR

MISSED APPROACH: Climb to 9000, then climbing right turn to 10100 direct TARGY LOM and hold.

AWOS-3P	SALT LAKE CENTER	UNICOM
118.1	132.4 338.3	123.0 (CTAF)

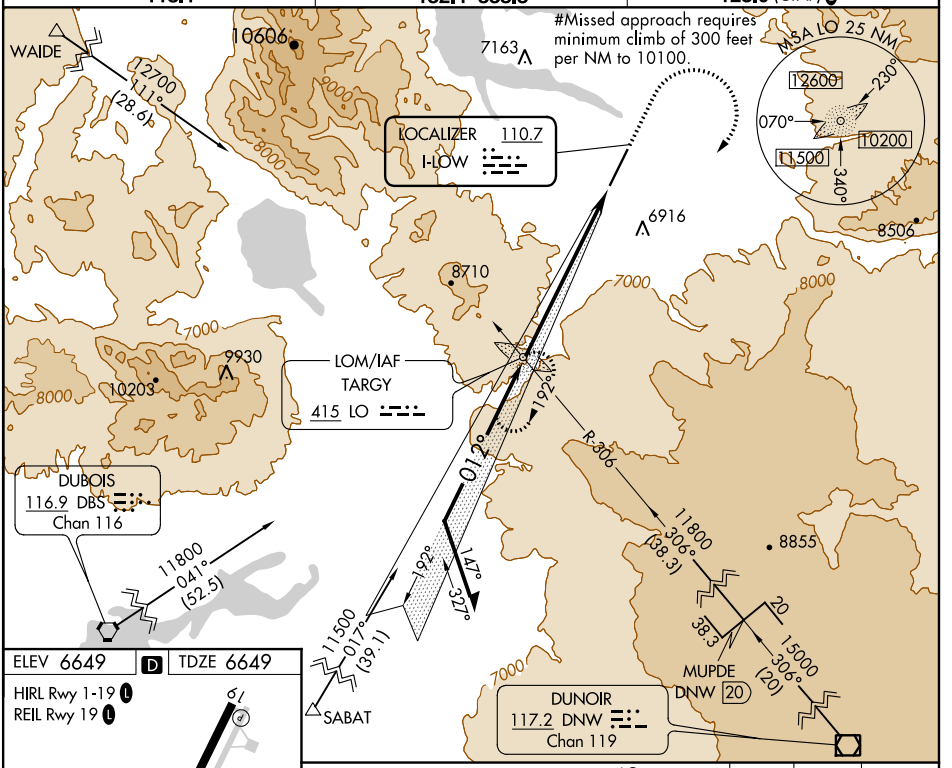

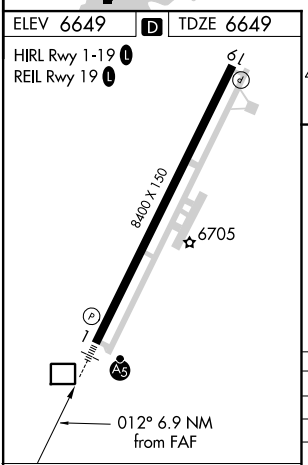

FAF to MAP 6.9 NM					
Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

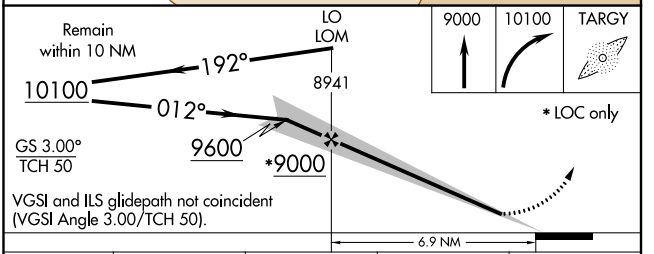

CATEGORY	A	B	C	D
S-ILS 1#	6849-½ 200 (200-½)			
S-ILS 1	7449-2¼ 800 (800-2¼)			
S-LOC 1	7780-1¼ 1131 (1200-1¼)	7780-1 1131 (1200-1)	7780-2½ 1131 (1200-2½)	
C CIRCLING	7780-1¼ 1131 (1200-1¼)	7780-1½ 1131 (1200-1½)	7780-3 1131 (1200-3)	8020-3 1371 (1400-3)

NW-1, 21 APR 2022 to 19 MAY 2022
NW-1, 21 APR 2022 to 19 MAY 2022