

|                      |                        |                             |   |
|----------------------|------------------------|-----------------------------|---|
| LOM RU<br><b>275</b> | APP CRS<br><b>202°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5501</b><br><b>772</b><br><b>772</b> |
|----------------------|------------------------|-----------------------------|---|




**NDB RWY 20**  
MID-CAROLINA RGNL (RUQ)

▼ **NA** When local altimeter setting not received, use Lexington altimeter setting and increase all MDA 40 feet, increase S-20 Cats C and D, and Circling Cat C visibility 1/8 SM and Circling Cat D 1/4 SM. For inop ALS, increase Cat D visibility to 1 7/8 SM. For inop ALS when using Lexington altimeter setting increase Cat D visibility to 2 SM.



**MISSED APPROACH:**  
Climb to 1800 then climbing right turn to 2500 direct ROVDY LOM and hold.

|                          |   |                           |                                 |
|--------------------------|---|---------------------------|---------------------------------|
| AWOS-3<br><b>118.175</b> | CHARLOTTE APP CON<br><b>128.325 307.8</b> | CLNC DEL<br><b>127.35</b> | UNICOM<br><b>122.725 (CTAF)</b> |
|--------------------------|---|---------------------------|---------------------------------|

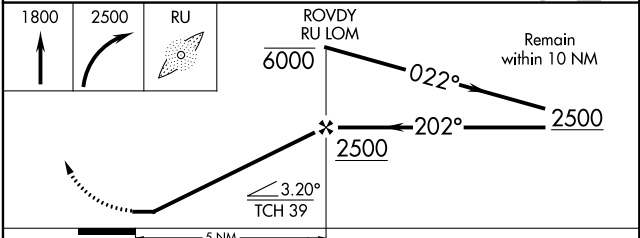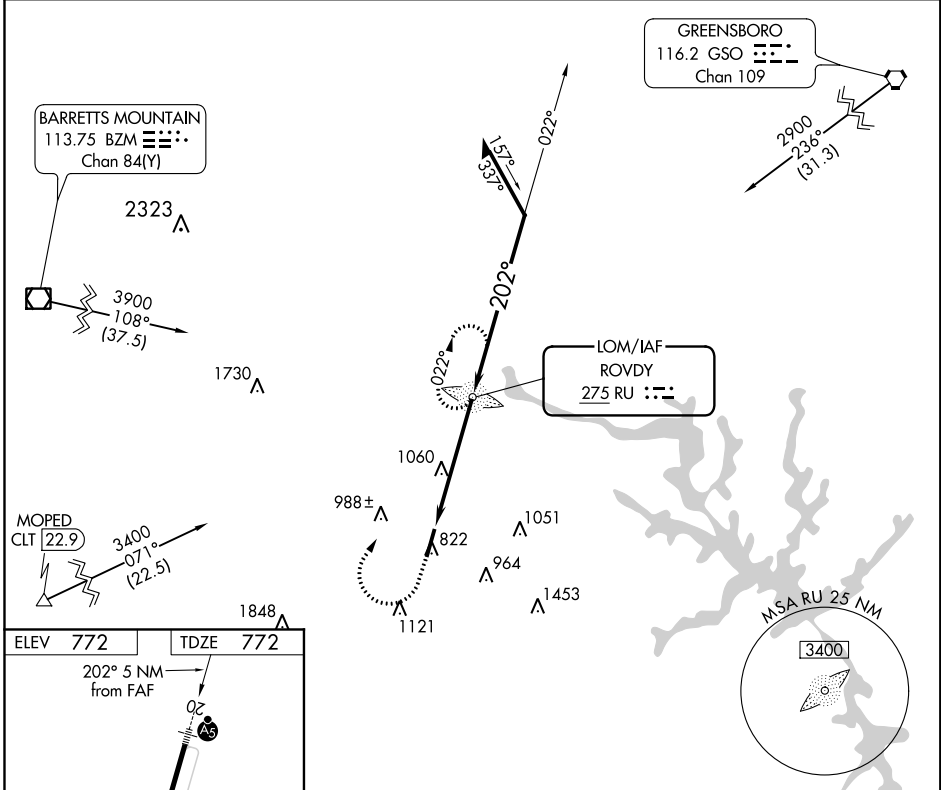

| CATEGORY                                     | A                      | B | C                  | D                  |
|--|------------------------|---|--------------------|--------------------|
| S-20   | 1420-3/4 648 (700-3/4) |   | 1420-1 648 (700-1) |                    |
| <input checked="" type="checkbox"/> CIRCLING | 1420-1 648 (700-1)     |   | 1440-1 668 (700-1) | 1440-2 668 (700-2) |

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 5:00 | 3:20 | 2:30 | 2:00 | 1:40 |

SE-2, 16 JUN 2022 to 14 JUL 2022

SE-2, 16 JUN 2022 to 14 JUL 2022