WAAS CH 56310 W25A	APP CRS 252°	Rwy Idg 6005 TDZE 860 Apt Elev 862

RNAV (GPS) RWY 25

INDIANAPOLIS RGNL (MQJ)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Indianapolis Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, and increase all visibilities ½ SM. When using Indianapolis altimeter setting inoperative table does not apply. For inoperative ALS, increase LPV all Cats visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 2900 direct RAPBO and on track 143° to SHB VOR/DME and hold.

AWOS-3	INDIANAPOLIS APP CON	CLNC DEL	UNICOM
124.175	127.15 317.8	119.25	122.975 (CTAF) L

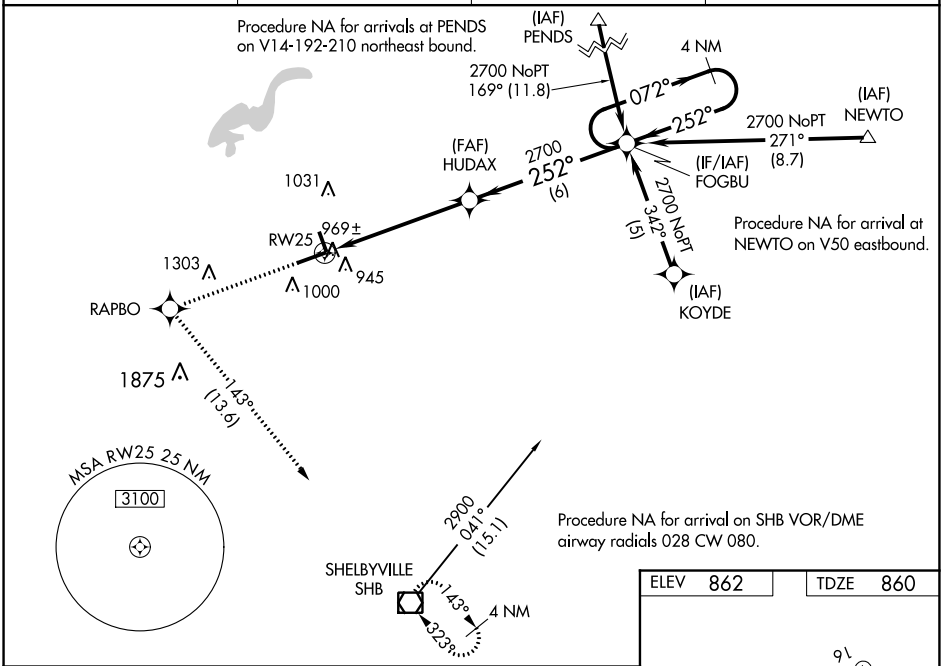

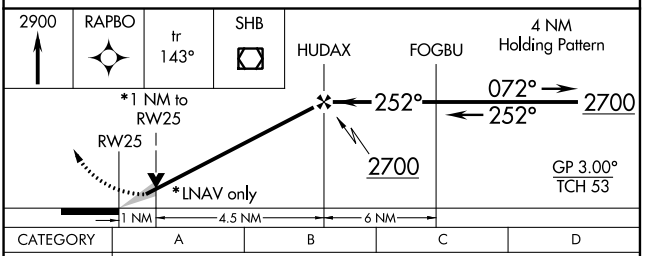

CATEGORY	A	B	C	D
LPV DA	1160-½ 300 (300-½)			
LNAV/VNAV DA	1259-⅞ 399 (400-⅞)			
LNAV MDA	1220-½ 360 (400-½)		1220-⅝ 360 (400-⅝)	
C CIRCLING	1340-1 478 (500-1)		1360-1½ 498 (500-1½)	1660-2½ 798 (800-2½)

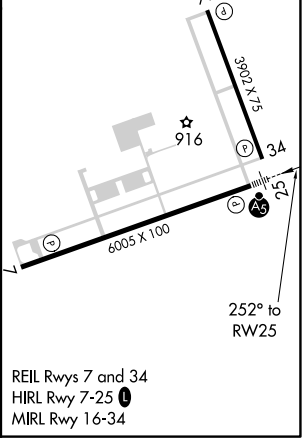

EC-2, 16 JUN 2022 to 14 JUL 2022
EC-2, 16 JUN 2022 to 14 JUL 2022