

(ROCKY1.ROCKY) 18032
ROCKY ONE DEPARTURE

AL-6452 (FAA)


INDIANAPOLIS RGNL (MQJ)
 INDIANAPOLIS, INDIANA

AWOS-3
 124.175
 CLNC DEL
 119.25
 INDIANAPOLIS DEP CON
 127.15 317.8

SPINNER
 112.7 SPI $\text{---}\cdot\cdot\cdot$
 Chan 74
 N39°50.38'-W89°40.66'
 L-27, H-5

TERRE HAUTE
 115.3 TTH $\text{---}\cdot\cdot\cdot$
 Chan 100
 N39°29.34'-W87°14.94'


BRICKYARD
 116.3 VHP $\text{---}\cdot\cdot\cdot$
 Chan 110

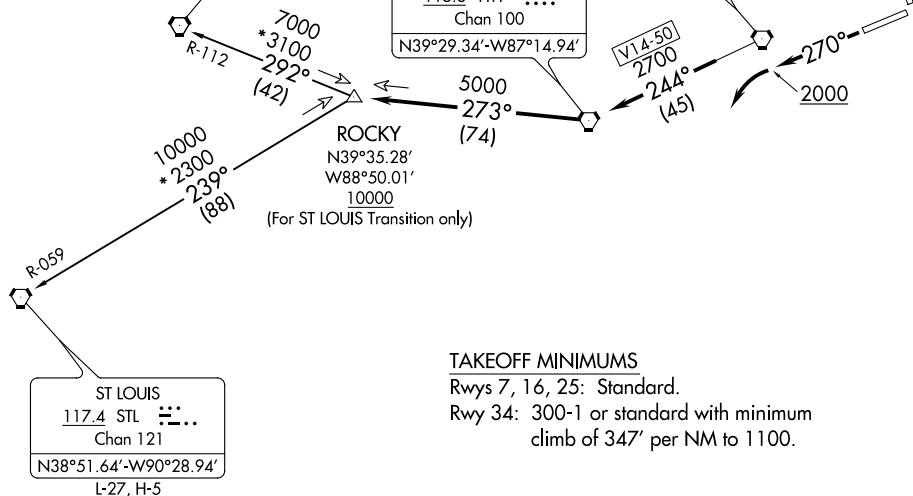

TAKEOFF MINIMUMS

Rwys 7, 16, 25: Standard.
 Rwy 34: 300-1 or standard with minimum climb of 347' per NM to 1100.

- NOTE: RADAR required.
- NOTE: Select appropriate localizer/DME frequency/channel prior to departure.
- NOTE: Turbojets accelerate to 250K until reaching 10000, if unable advise ATC.
- NOTE: Assigned to aircraft with a requested altitude of 11000 or above.



NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 25: Climb heading 270° to 2000 before turning left. Then on assigned heading to assigned altitude. Thence

DEPARTING ALL OTHER AUTHORIZED RUNWAYS: Climb on assigned heading to assigned altitude. Thence

. . . . expect RADAR vectors to join VHP R-244 to TTH VORTAC, then via TTH R-273 to ROCKY INT then via transition or assigned route. Expect clearance to requested altitude ten minutes after departure.

SPINNER TRANSITION (ROCKY1.SPI): From over ROCKY INT on SPI R-112 to SPI VORTAC.
ST LOUIS TRANSITION (ROCKY1.STL): From over ROCKY INT on STL R-059 to STL VORTAC.

ROCKY ONE DEPARTURE
(ROCKY1.ROCKY) 01FEB18

INDIANAPOLIS, INDIANA
 INDIANAPOLIS RGNL (MQJ)

EC-2, 16 JUN 2022 to 14 JUL 2022

EC-2, 16 JUN 2022 to 14 JUL 2022