


LOC I-TVR 109.7	APP CRS 357°	Rwy Idg 5002 TDZE 86 Apt Elev 86
---------------------------	------------------------	---


ILS or LOC RWY 36

VICKSBURG TALLULAH RGNL (TVR)



ADF required. When local altimeter setting not received, use Vicksburg Muni, MS altimeter setting and increase S-ILS 36 DA to 309 feet; increase all MDA 40 feet and visibility Cats C and D ¼ mile.


SSALR  MISSED APPROACH: Climb to 1000 then climbing left turn to 2100 direct TKH NDB and hold.

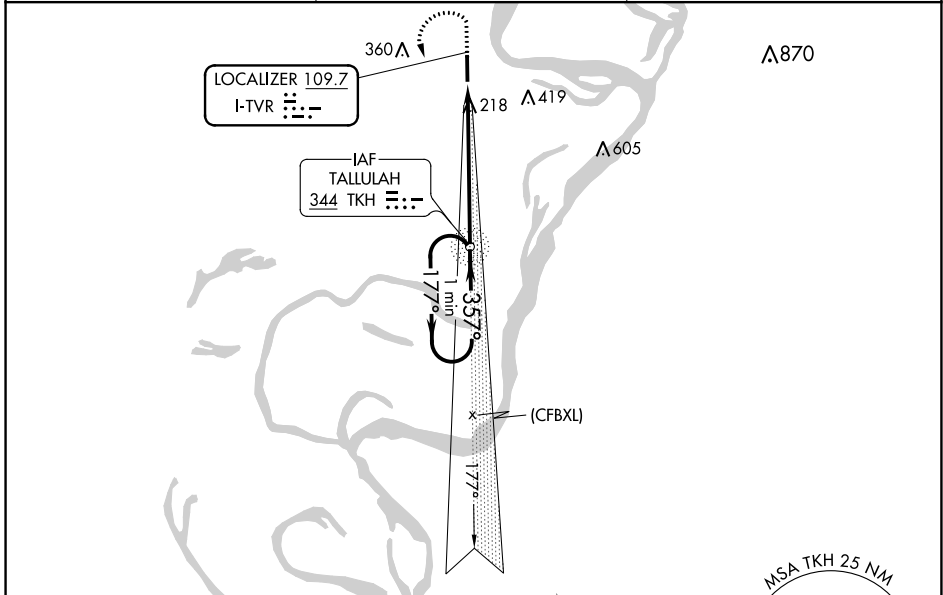ASOS 118.525	MEMPHIS CENTER 132.5 259.1	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------



ADF REQUIRED

ELEV 86	D	TDZE 86
REIL Rwy 18 	MIRL Rwy 18-36 	36 357° 6 NM from FAF
FAF to MAP 6 NM		
Knots	60	90
Min:Sec	6:00	4:00
	120	150
	2:24	2:00

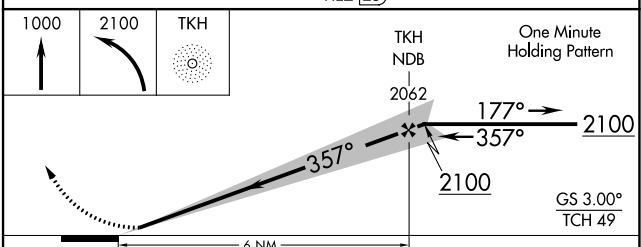

TKH NDB	2062	177°	2100
TKH	2100	357°	2100
One Minute Holding Pattern			
GS 3.00°			
TCH 49			
CATEGORY	A	B	C
S-ILS 36	286-½ 200 (200-½)		
S-LOC 36	540-½	454 (500-½)	540-⅞ 454 (500-⅞)
C CIRCLING	540-1	454 (500-1)	720-1¾ 634 (700-1¾) 720-2 634 (700-2)