FAIRFIELD, CALIFORNIA

ILS or LOC RWY 3L

LOC I-TXV	APCH CRS	Rwy ldg 11,001 TDZE 34 Arpt Elev 63
108.35	035°	

AL-488 [USAF]

TRAVIS AFB (KSUU)

RADAR required (When holding above 6000′ at SEATO).

*When Rwy 3R VGSI inop, circling to Rwy 3R not authorized at night.

†MISSED APPROACH: Climb to 5000 on SUU R-028 to JOTKU. Then climbing left turn heading 290°, intercept SUU R-339 to SEATO and hold, continue climb and hold to 5000.

ATIS	APP CON	TOWER	GND CON	CLNC DEL
135.55 292.125	119.9 322.325 (S) 126.6 281.45 (N)	120.75 254.4	121.8 289.4	127.55 335.8

Circling not authorized NW of Rwy 3L-21R.

† Missed approach requires use of RNAV or ATC radar monitoring.

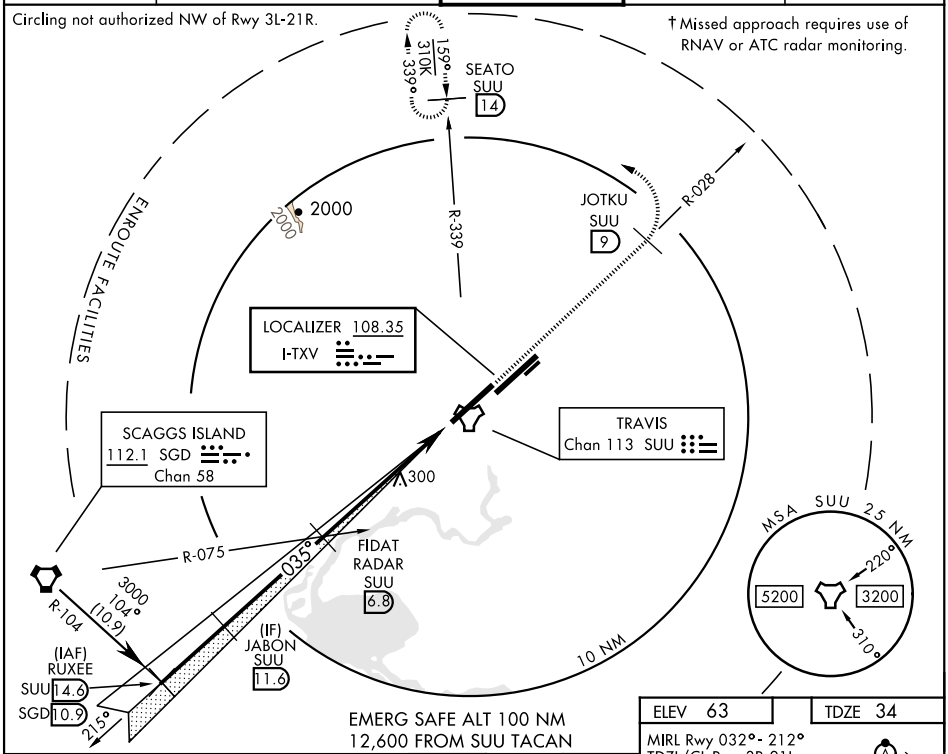

EMERG SAFE ALT 100 NM
12,600 FROM SUU TACAN

ELEV 63	TDZE 34

MIRL Rwy 032°- 212°
TDZL/CL Rwy 3R-21L
HIRL Rwy 3L-21R, 3R-21L

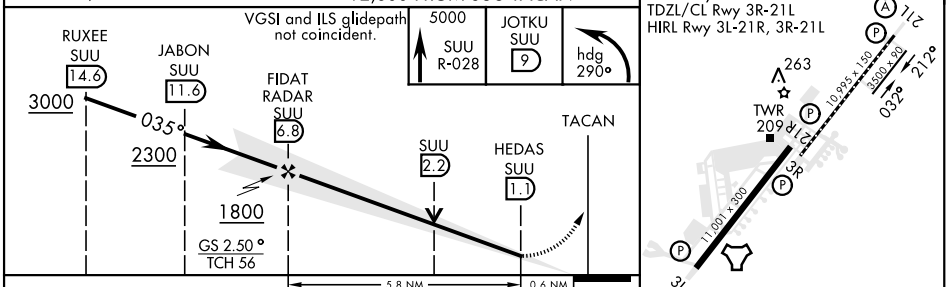

CATEGORY	A	B	C	D	E
S-ILS 3L	234/40		200	(200-¾)	
S-LOC 3L	560/55 526 (500-1)		560-1½	526	(500-1½)
C CIRCLING*	560-1 497 (500-1)	580-1 517 (600-1)	1100-3 1037(1100-3)	1200-3 1137 (1200-3)	

FAF to MAP 5.8 NM					
Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56