ILS or LOC RWY 26R

HARRY REID INTL (LAS)

LOC/DME I-LAS	APP CRS		26R	26L
110.3	259°	Rwy Idg	12638	10526
Chan 40		TDZE	2067	2069
		Apt Elev	2181	2181

From BERBN: RNP APCH - GPS required.

T For inop ALS, increase S-ILS-26R all Cats visibility to 7/8 SM, S-LOC-26R Cat E visibility to 1 3/8 SM. Inop table does not apply to Sidestep Rwy 26L.

A

MALS Rwy 26R (A4) MALSF Rwy 26L (A4)

MISSED APPROACH: Climb to 3200 then climbing right turn to 6000 on heading 080° and BLD R-286 to BLD VORTAC and hold, continue climb-in-hold to 6000.

D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER	GND CON	CLNC DEL	CPDLC
132.4	125.025 379.15 (West)	118.75 257.8 (Rwy 1L/19R, 1R/19L)	121.1 270.8 E of 1R/19L	118.0	
	119.775 282.2 (East)	119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.9 254.3 W of 1R/19L		

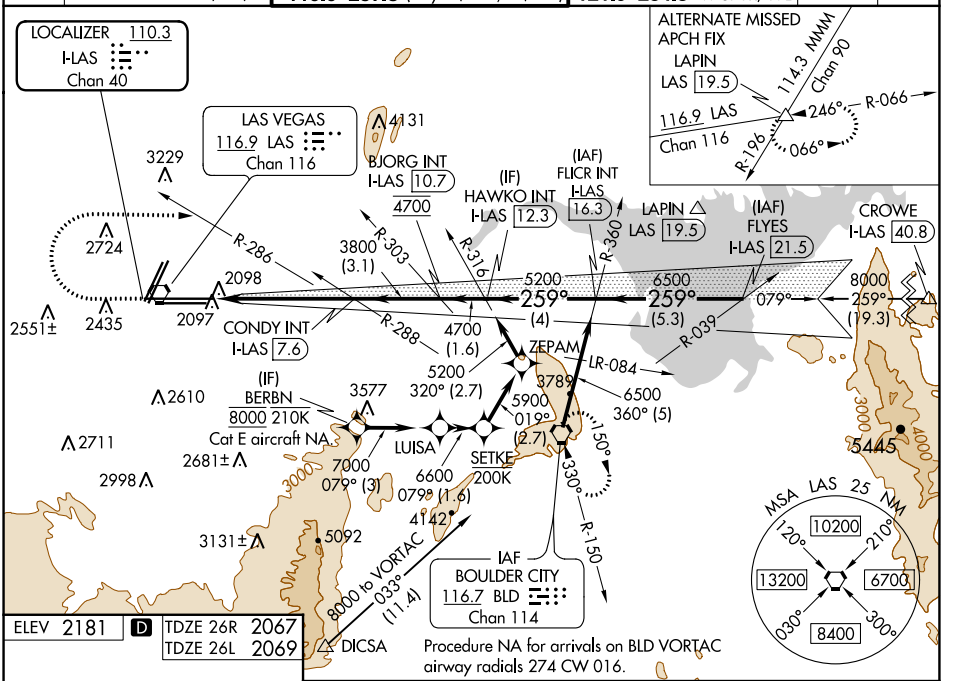

ELEV 2181 D TDZE 26R 2067 TDZE 26L 2069



MIRL Rwy 1R-19L
REIL Rwys 1R, 8R, 19L and 19R
HIRL Rwys 1L-19R, 8L-26R and 8R-26L

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

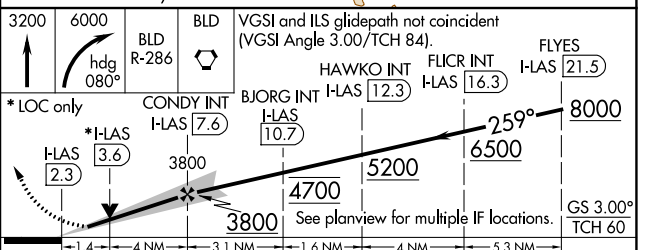

CATEGORY	A	B	C	D	E
S-ILS 26R	2334-¾ 267 (200-¾)				
S-LOC 26R	2560-¾ 493 (400-¾)		2560-1⅛ 493 (400-1⅛)		
SIDESTEP 26L	2560-1 491 (400-1)		2560-1½ 491 (400-1½)	2560-2 491 (400-2)	
C CIRCLING	3020-1¼ 839 (900-1¼)	3060-1¼ 879 (900-1¼)	3100-2¾ 919 (1000-2¾)	3540-3 1359 (1400-3)	

SW-4, 23 FEB 2023 to 23 MAR 2023
SW-4, 23 FEB 2023 to 23 MAR 2023