ILS or LOC RWY 14

INDIANAPOLIS INTL (IND)

LOC I-BJP	APP CRS	Rwy Idg / TDZE / Apt Elev
110.5	140°	7278 / 796 / 796

RADAR required.

For inop ALS, increase S-LOC 14 Cat C and D visibility to RVR 5500.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 on VHP R-136 to OZMOE INT/ VHP 20.1 DME and hold.

D-ATIS	INDIANAPOLIS APP CON	INDY TOWER	GND CON	CLNC DEL	CPDLC
134.25	128.175 317.8	120.9 257.8	121.9	128.75 257.8	

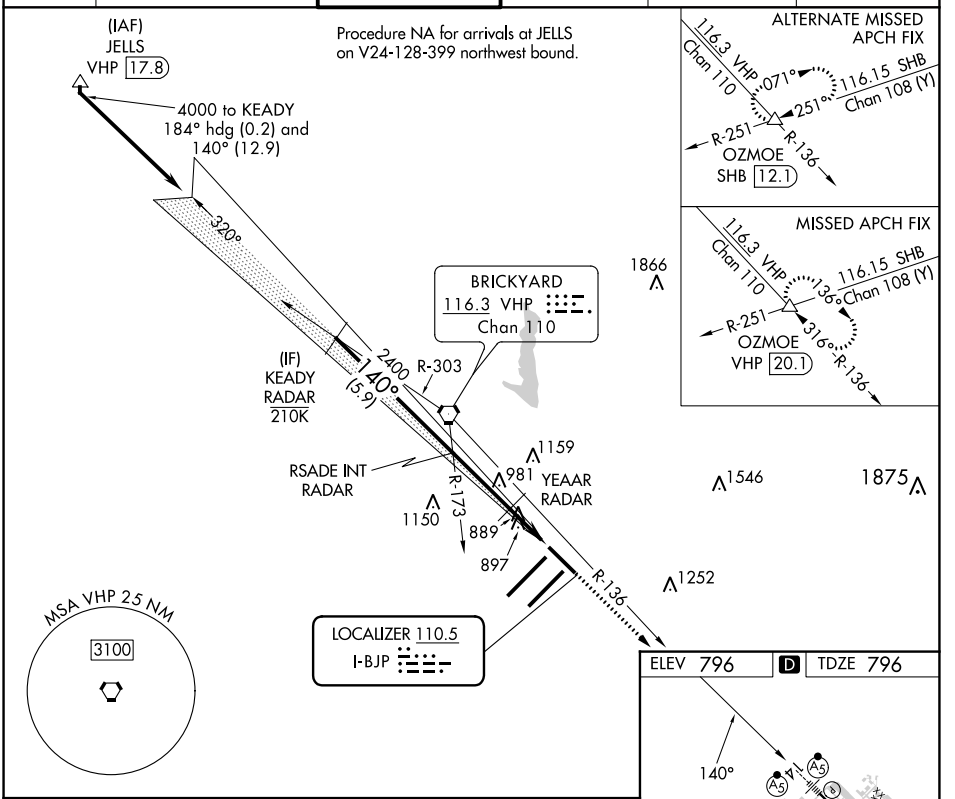

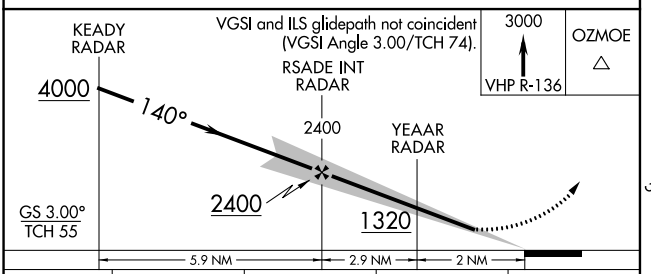

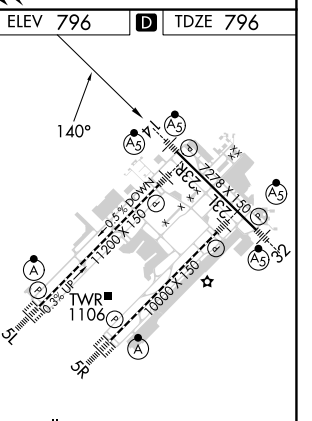

CATEGORY	A	B	C	D
S-ILS 14 *	996/24 200 (200-½)			
S-LOC 14	1140/24 344 (400-½)		1140/30 344 (400-⅝)	
C CIRCLING	1420-1 624 (700-1)		1420-1¾ 624 (700-1¾)	1560-2½ 764 (800-2½)

HIRL all Rwys
TDZ/CL Rwys 5L and 5R

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

EC-2, 23 MAR 2023 to 20 APR 2023
EC-2, 23 MAR 2023 to 20 APR 2023