

RNAV (RNP) Z RWY 17L

RENO/TAHOE INTL (RNO)



APP CRS	Rwy Idg	9000
167°	TDZE	4415
	Apt Elev	4415

RNP AR APCH - GPS.



▼ For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C.

MISSED APPROACH: Climb to 13000 on track 167° to ZIDGO and on track 184° to USINE and on track 127° to YARKU and hold, continue climb-in-hold to 13000.
 # Missed approach requires minimum climb of 203 feet per NM to 5040.
 * Missed approach requires minimum climb of 264 feet per NM to 7260.

D-ATIS	NORCAL APP CON	RENO TOWER	GND CON	CLNC DEL	CPDLC
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6	124.9 370.85	

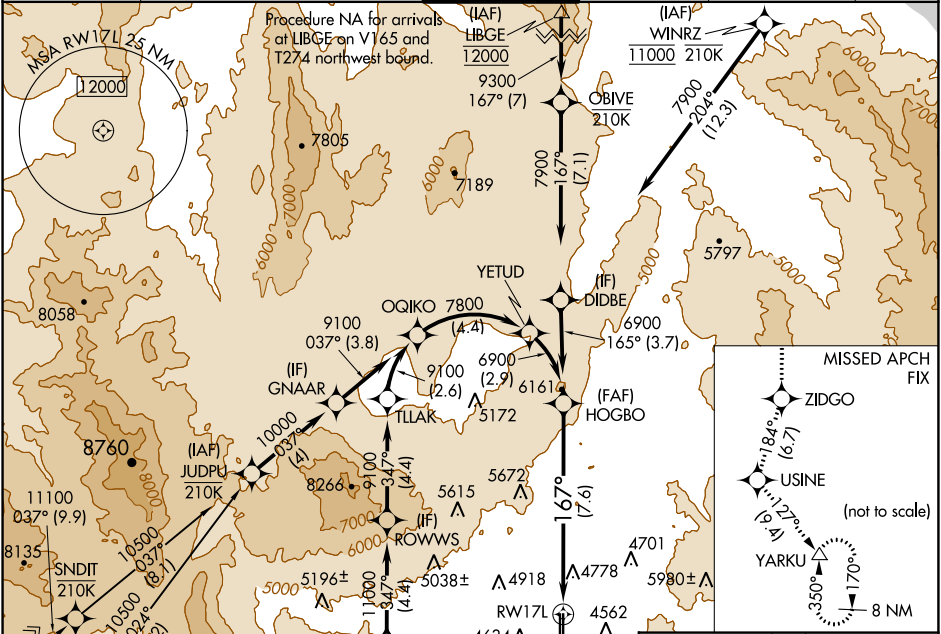

ELEV 4415	TDZE 4415
-----------	-----------

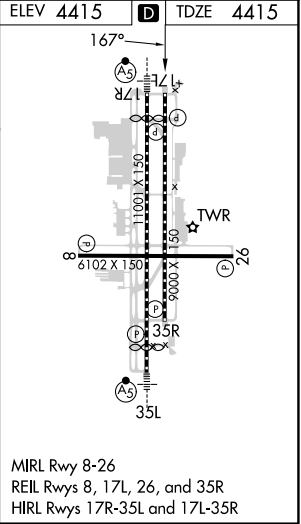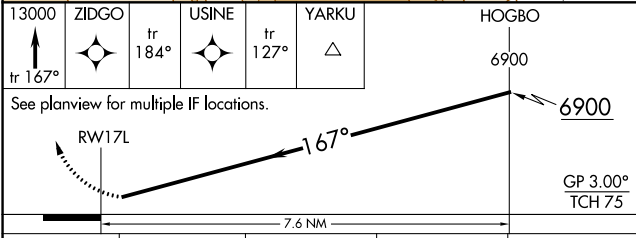

CATEGORY	A	B	C	D
RNP 0.12 DA*		4754-1	339 (400-1)	
RNP 0.17 DA#		5017-1¾	602 (700-1¾)	
RNP 0.30 DA		5067-1⅞	652 (700-1⅞)	

AUTHORIZATION REQUIRED

MIRL Rwy 8-26
 REIL Rwy 8, 17L, 26, and 35R
 HIRL Rwy 17R-35L and 17L-35R

SW-4, 23 MAR 2023 to 20 APR 2023

SW-4, 23 MAR 2023 to 20 APR 2023