RNAV (GPS) RWY 18R

ORLANDO INTL (MCO)

WAAS	APP CRS	Rwy Idg	12004
CH 63212	185°	TDZE	94
W18B		Apt Elev	96

RNP APCH - GPS.

LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C.

MALSR

MISSED APPROACH: Climb to 500 then climbing right turn to 4000 direct CAMBE and hold, continue climb-in-hold to 4000.

D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON	CLNC DEL	CPDLC
ARR 121.25	124.8 307.0	118.45 253.5 (Rwys 17L-35R,17R-35L)	126.4 (East)	134.7	
DEP 120.525		124.3 253.5 (Rwys 18L-36R,18R-36L)	121.8 (West)	341.7	

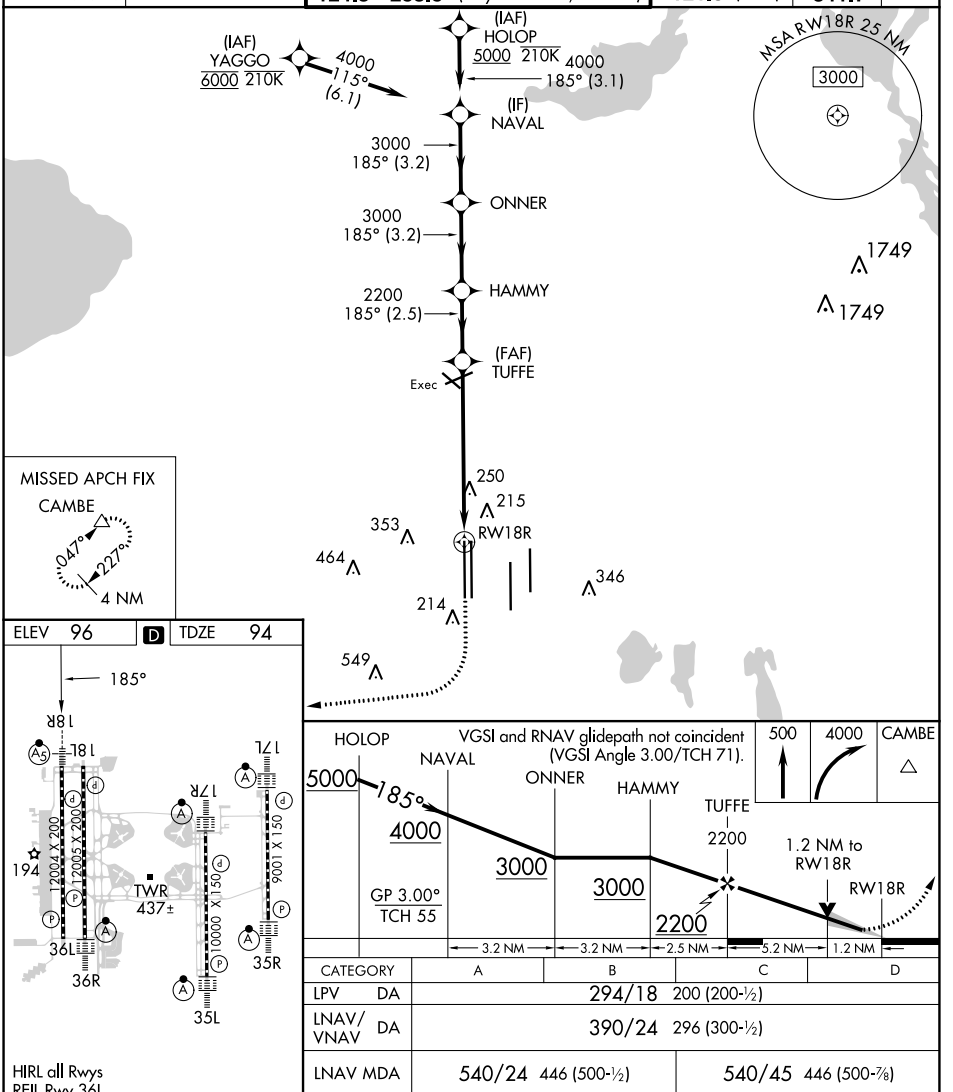

CATEGORY	A	B	C	D
LPV DA	294/18 200 (200-½)			
LNAV/VNAV DA	390/24 296 (300-½)			
LNAV MDA	540/24 446 (500-½)		540/45 446 (500-⅞)	
C CIRCLING	740-1 644 (700-1)		740-1¾ 644 (700-1¾)	740-2 644 (700-2)

SE-3, 23 MAR 2023 to 20 APR 2023
SE-3, 23 MAR 2023 to 20 APR 2023