ILS or LOC RWY 4L
JOHN F KENNEDY INTL (JFK)

LOC/DME I-HIQ 110.9 Chan 46	APP CRS 044°	Rwy ldg 11010 TDZE 13 Apt Elev 13

RADAR required for procedure entry. DME or RADAR required for LOC only.

T Simultaneous approach authorized.
A Autopilot coupled approach NA below 200 feet MSL.

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 on JFK VOR/DME R-062 to DUFFY INT/JFK 14.8 DME and hold.

D-ATIS (ARR/DEP)	(ARR-NE)	(ARR-SW)	NEW YORK APP CON		KENNEDY TOWER		GND CON	CLNC DEL	CPDLC
128.725	117.7	115.4	128.125	269.0	Rwys 4R/22L and 13L/31R 119.1 Rwys 4L/22R and 13R/31L 123.9	281.55 281.55	121.9 348.6	135.05 348.6	

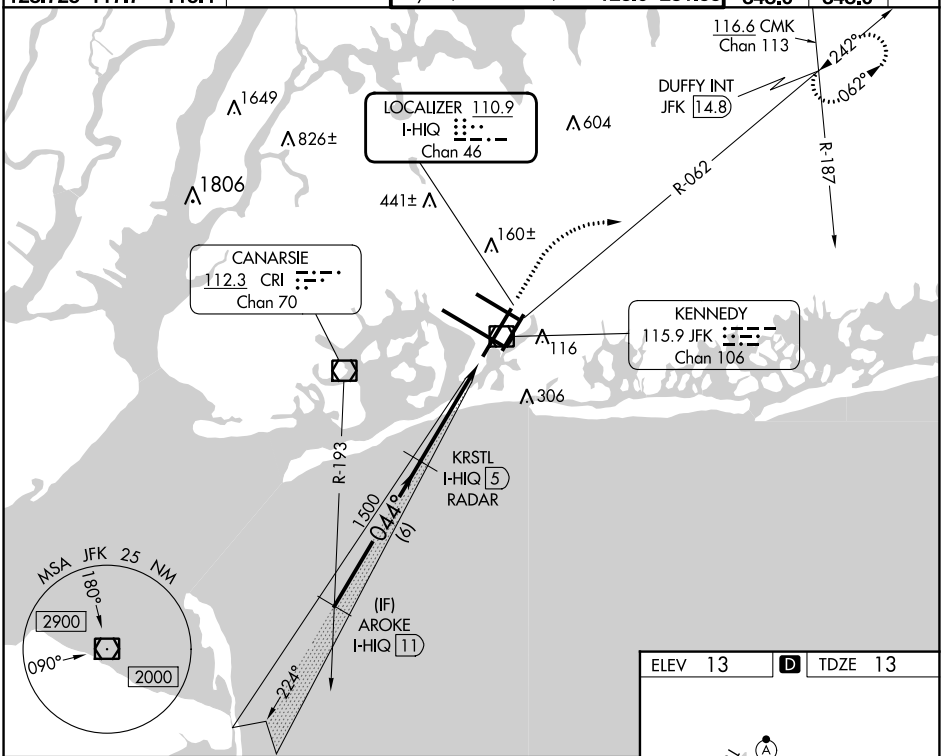

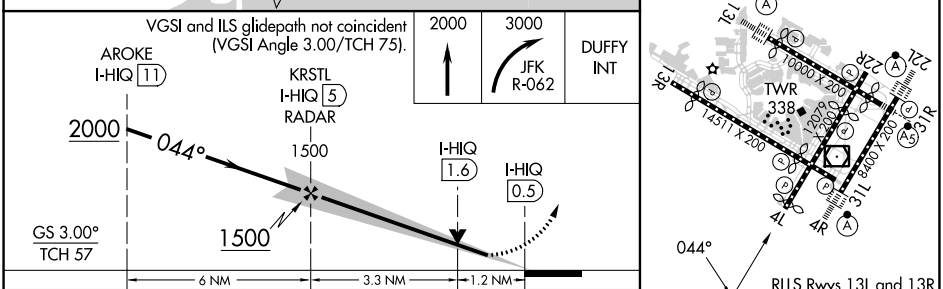

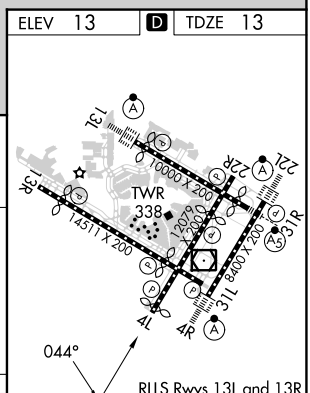

RLLS Rwys 13L and 13R
HIRL all Rwys
TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R

CATEGORY	A	B	C	D
S-ILS 4L	231/40 218 (300-¾)			
S-LOC 4L	460/55 447 (500-1)		460-1⅜ 447 (500-1⅜)	
C CIRCLING	640-1 627 (700-1)		700-2 687 (700-2)	700-2¼ 687 (700-2¼)

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

NE-2, 28 DEC 2023 to 25 JAN 2024
NE-2, 28 DEC 2023 to 25 JAN 2024