


LOC/DME I-BRU 108.7 Chan 24	APP CRS 275°	Rwy Idg TDZE Apt Elev	26L 9999 996 1026	26R 8500 990 1026
--	------------------------	-----------------------------	---	---

ILS or LOC RWY 26L

HARTSFIELD-JACKSON ATLANTA INTL (ATL)


RADAR required.

▼ Inop table does not apply to sidestep Rwy 26R Cats A and B. For inop ALS, increase S-ILS 26L all Cats visibility to RVR 4500 and S-LOC 26L Cat E visibility to RVR 6000. For inop ALS to Rwy 26R, increase sidestep 26R Cat E visibility to 2 SM. Simultaneous approach authorized.





MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 on heading 290° and RMG R-132 to DALAS INT/RMG VORTAC 18.5 DME and hold.

D-ATIS ARR 119.65	ATLANTA APP CON DEP 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4				ALL RWYS 121.9	GND CON (8L-26R,8R-26L) (9L-27R,9R-27L) 10-28 121.75 121.65 254.4	ALL RWYS
-----------------------------	--	--	--	--	--	-----------------------------	--	-------------

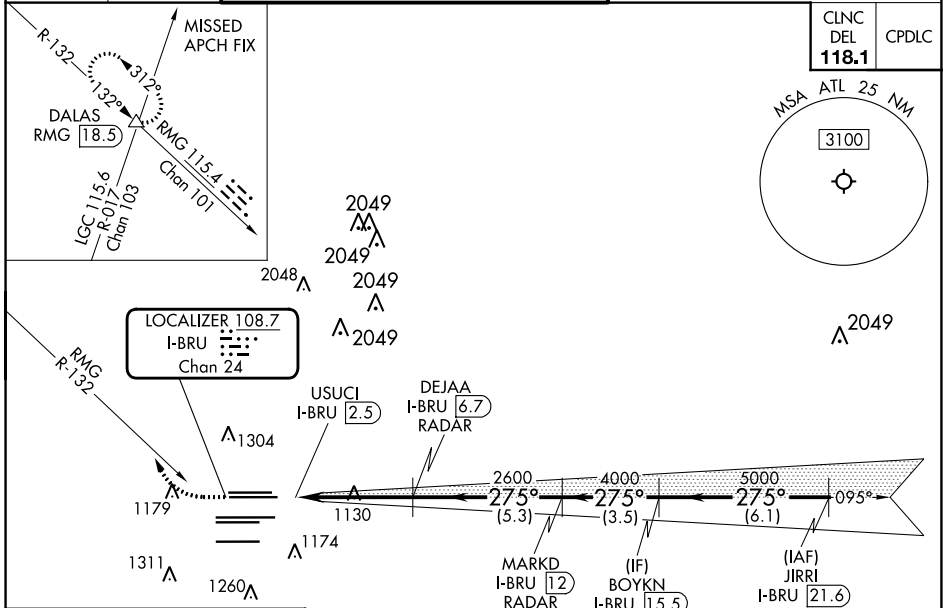

ELEV 1026	D	TDZE 26L 996	TDZE 26R 990
-----------	----------	--------------	--------------

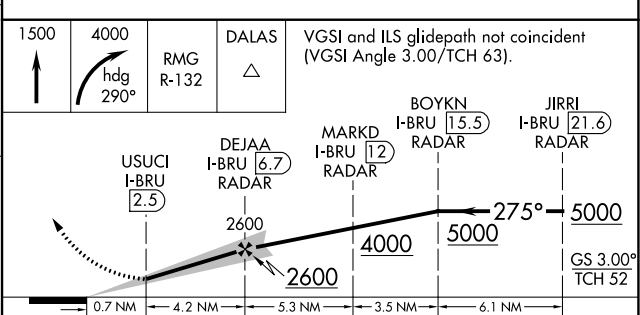

FAF to MAP 4.2 NM	HIRL all Rwys TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28				
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24
SIDESTEP 26R	1380/55 390 (400-1)		1380-1½ 390 (400-1½)		

SE-4, 22 FEB 2024 to 21 MAR 2024

SE-4, 22 FEB 2024 to 21 MAR 2024