ILS or LOC RWY 8L

HARTSFIELD-JACKSON ATLANTA INTL (ATL)

LOC/DME I-HFW	APP CRS		8L	8R
109.3	095°	Rwy Idg	8800	9999
Chan 30		TDZE	1015	1024
		Apt Elev	1026	1026

RADAR required for procedure entry. DME or RADAR required.

Simultaneous approach authorized.
Inop table does not apply to sidestep 8R.

Rwy 8L ALSF-2

MISSED APPROACH: Climb to 1500 then climbing left turn to 3500 on heading 360° and RMG VORTAC R-115 to TROYS/RMG 38.1 DME/RADAR and hold.

D-ATIS	ATLANTA	ATLANTA TOWER						GND CON			
ARR 119.65	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	ALL RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	ALL RWYS
DEP 125.55	127.9 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4

CLNC DEL 118.1 | CPDLC

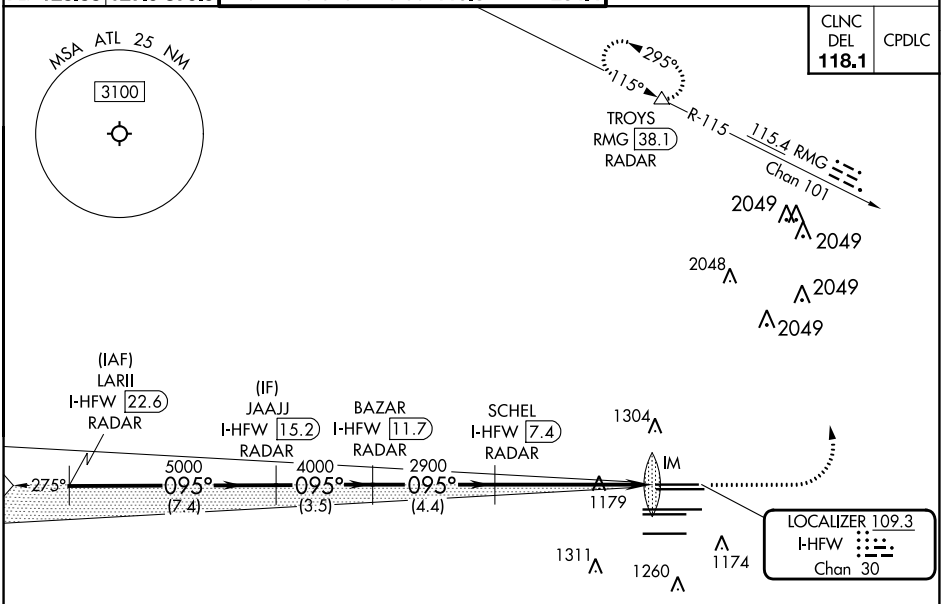

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).

1500 | 3500 hdg 360° | RMG R-115 | TROYS

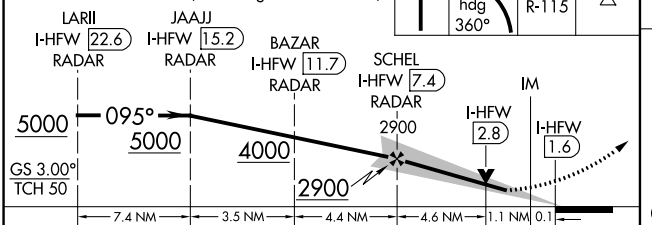

ELEV 1026 D | TDZE 8L 1015 | TDZE 8R 1024



HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28

CATEGORY	A	B	C	D
S-ILS 8L	1215/18 200 (200-½)			
S-LOC 8L	1460/24 445 (500-½)		1460/45 445 (500-⅞)	
SIDESTEP 8R	1460/55 436 (500-1)		1460-1½ 436 (500-1½)	1460-2 436 (500-2)

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

SE-4, 22 FEB 2024 to 21 MAR 2024
SE-4, 22 FEB 2024 to 21 MAR 2024