

APP CRS	Rwy Idg	9000
275°	TDZE	998
	Apt Elev	1026

RNAV (RNP) Z RWY 28

HARTSFIELD-JACKSON ATLANTA INTL (ATL)


For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized; arrival from RODNN NA. For inop ALS, increase RNP 0.11 DA all Cats visibility to RVR 4000 and RNP 0.30 DA all Cats visibility to RVR 4500.



MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.

D-ATIS	ATLANTA	ATLANTA TOWER				ALL	GND CON		ALL		
ARR 119.65	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	RWYS
DEP 125.55	127.9 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4





CLNC DEL	CPDLC
118.1	

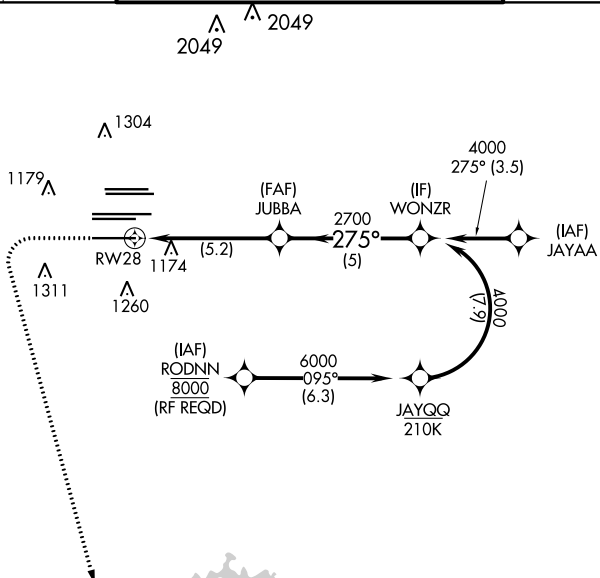

SE-4, 22 FEB 2024 to 21 MAR 2024

SE-4, 22 FEB 2024 to 21 MAR 2024

ELEV 1026 **D** TDZE 998

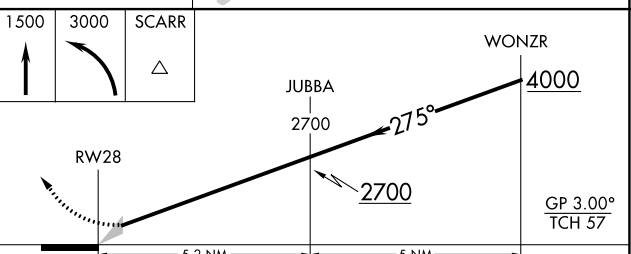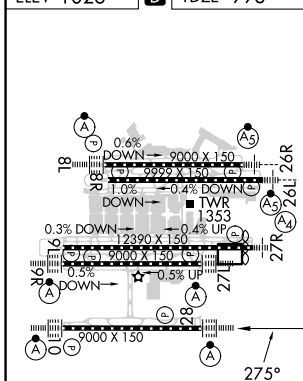

CATEGORY	A	B	C	D
RNP 0.11 DA		1248/24	250 (300-1/2)	
RNP 0.30 DA		1295/24	297 (300-1/2)	

HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R,
27L and 28

AUTHORIZATION REQUIRED