

RNAV (GPS) X RWY 22L

JOHN F KENNEDY INTL (JFK)

APP CRS	Rwy Idg	8400
234°	TDZE	12
	Apt Elev	13


RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.4°C or above 5.4°C.
For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climbing left turn to 3000 direct CHANT and hold.


D-ATIS (ARR/DEP) (ARR-NE) (ARR-SW)	NEW YORK APP CON	KENNEDY TOWER Rwys 4R/22L and 13L/31R Rwys 4L/22R and 13R/31L	119.1 281.55	GND CON	CLNC DEL	CPDLC
128.725 117.7 115.4	128.125 269.0			121.9 348.6	135.05 348.6	

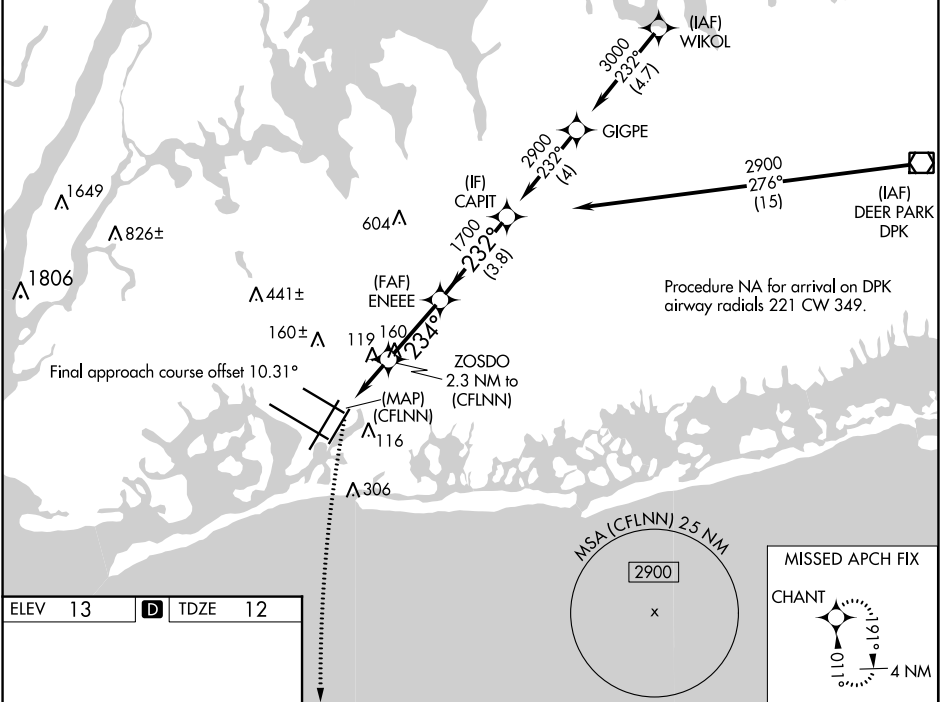


NE-2, 22 FEB 2024 to 21 MAR 2024

NE-2, 22 FEB 2024 to 21 MAR 2024

ELEV 13	D	TDZE 12
---------	----------	---------

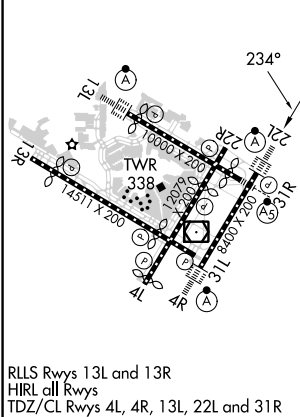

RLS Rwys 13L and 13R
HIRL all Rwys
TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R

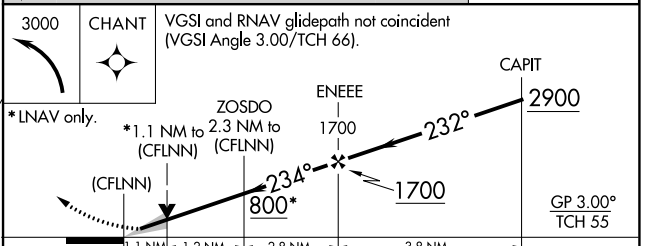

CATEGORY	A	B	C	D
LNAV/VNAV DA	413/40		401 (400-¾)	
LNAV MDA	440/24	428 (500-½)	440/40	428 (500-¾)
C CIRCLING	640-1	627 (700-1)	680-1¾ 667 (700-1¾)	680-2 667 (700-2)