RASLR THREE DEPARTURE (RNAV)

(RASLR3.RASLR) 27JAN22

LAS VEGAS, NEVADA
HARRY REID INTL (LAS)

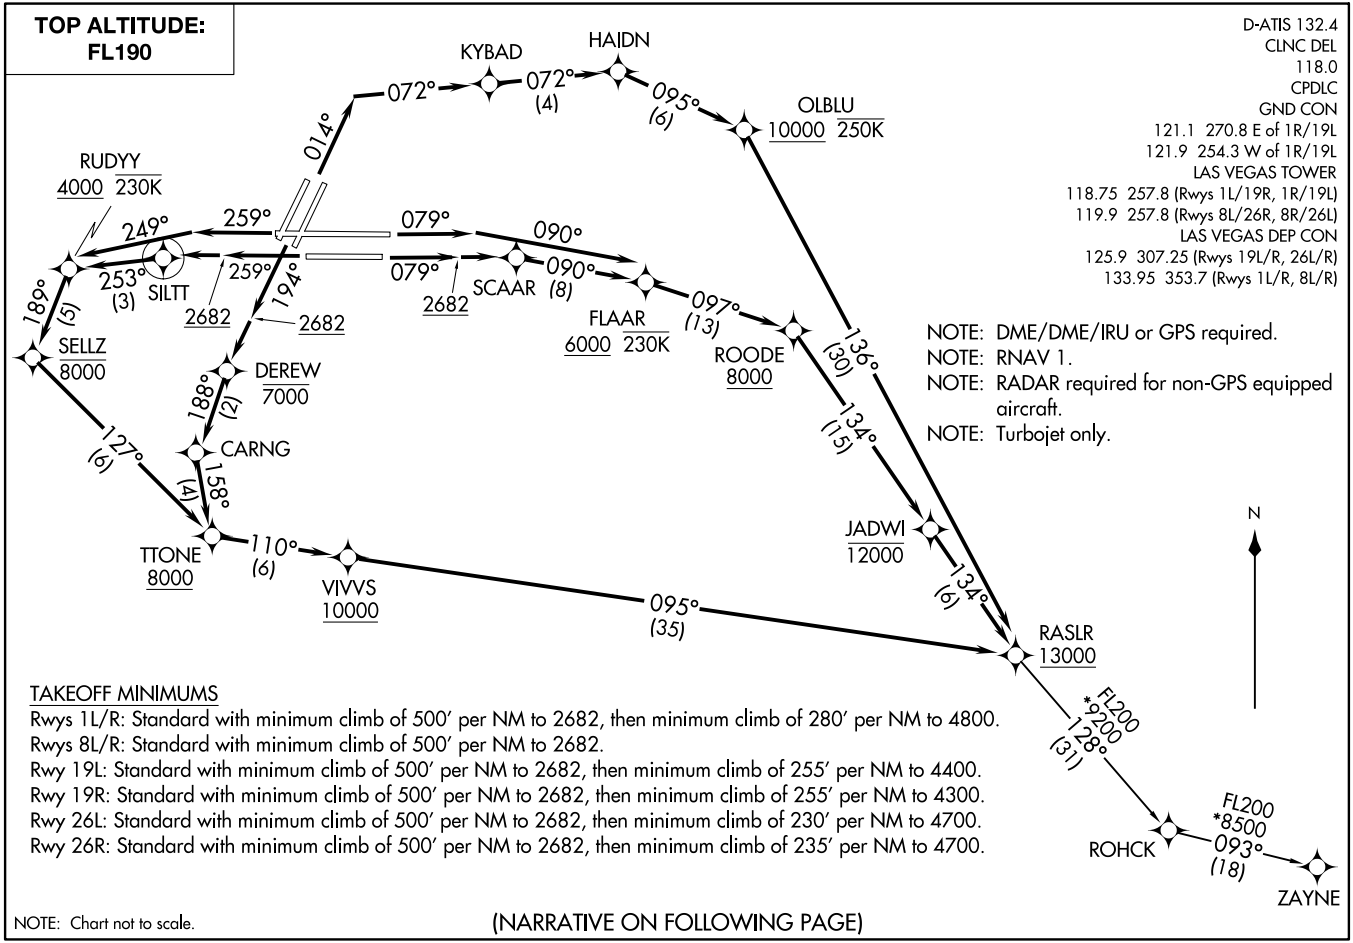

TAKEOFF MINIMUMS

Rwys 1L/R: Standard with minimum climb of 500′ per NM to 2682, then minimum climb of 280′ per NM to 4800.
Rwys 8L/R: Standard with minimum climb of 500′ per NM to 2682.
Rwy 19L: Standard with minimum climb of 500′ per NM to 2682, then minimum climb of 255′ per NM to 4400.
Rwy 19R: Standard with minimum climb of 500′ per NM to 2682, then minimum climb of 255′ per NM to 4300.
Rwy 26L: Standard with minimum climb of 500′ per NM to 2682, then minimum climb of 230′ per NM to 4700.
Rwy 26R: Standard with minimum climb of 500′ per NM to 2682, then minimum climb of 235′ per NM to 4700.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

(RASLR3.RASLR) 22027

RASLR THREE DEPARTURE (RNAV)

AL-662 (FAA)

HARRY REID INTL (LAS)
LAS VEGAS, NEVADA