

TOP ALTITUDE:
16000



NOTE: Chart not to scale.

TAKEOFF MINIMUMS
Rwys 15L/R, 26L/R, 27, 33L/R: Standard with
minimum climb of 500' per NM to 1200.


NOTE: RADAR required.

NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

NOTE: For use during west flow at IAH, for east flow
file the PITZZ DEPARTURE.

- D-ATIS 124.05
- CINCDEL 128.1
- CPDLC 126.675
- GND CON 118.575 (Rwys 8L/R, 26L/R, 9, 27)
- 121.7 (Rwys 15L/R, 33L/R)
- HOUSTON TOWER 120.725 290.2 (Rwys 8L, 26R)
- 125.35 290.2 (Rwys 8R, 26L)
- 127.3 288.25 (Rwys 15L/R, 33L/R)
- 135.15 290.2 (Rwys 9, 27)
- HOUSTON DEP CON 126.675 339.8

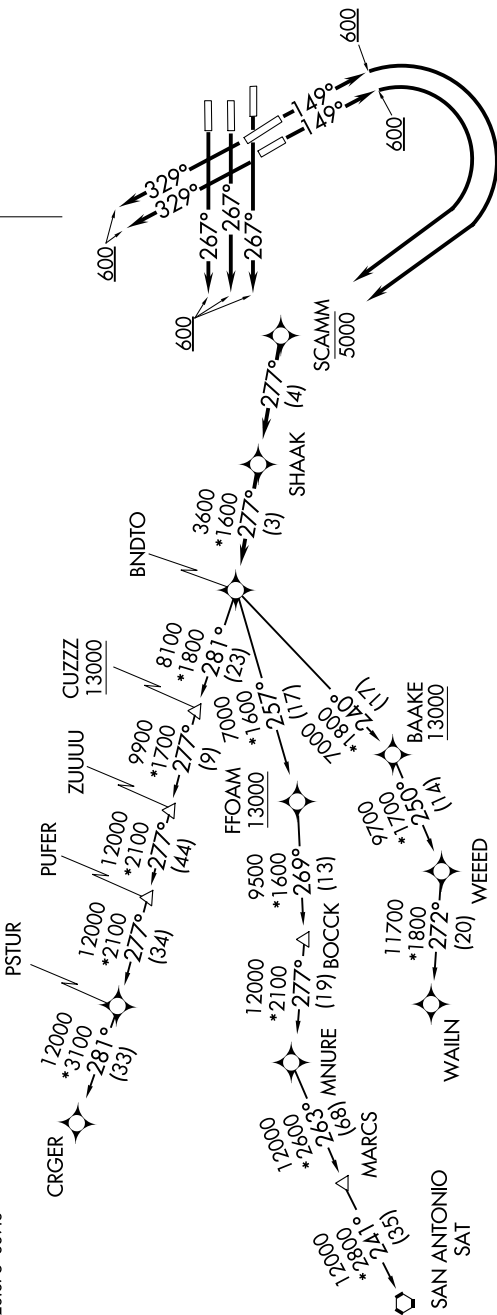

(NARRATIVE ON FOLLOWING PAGE)