


APP CRS	Rwy Idg	<b>10000</b>
<b>267°</b>	TDZE	<b>86</b>
	Apt Elev	<b>96</b>

# RNAV (RNP) Y RWY 27

GEORGE BUSH INTCNTL/HOUSTON (IAH)

RNP AR APCH - GPS.		ALSf-2	MISSED APPROACH: Climb to 560 then climbing left turn to 3000 direct TICOY and hold.		
Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -2°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 4500.					


D-ATIS	HOUSTON APP CON	HOUSTON TOWER	GND CON	CLNC DEL	CPDLC
<b>124.05</b>	<b>120.05 379.1 EAST</b> <b>124.35 316.15 WEST</b>	<b>135.15 290.2</b>	<b>118.575</b>	<b>128.1</b>	

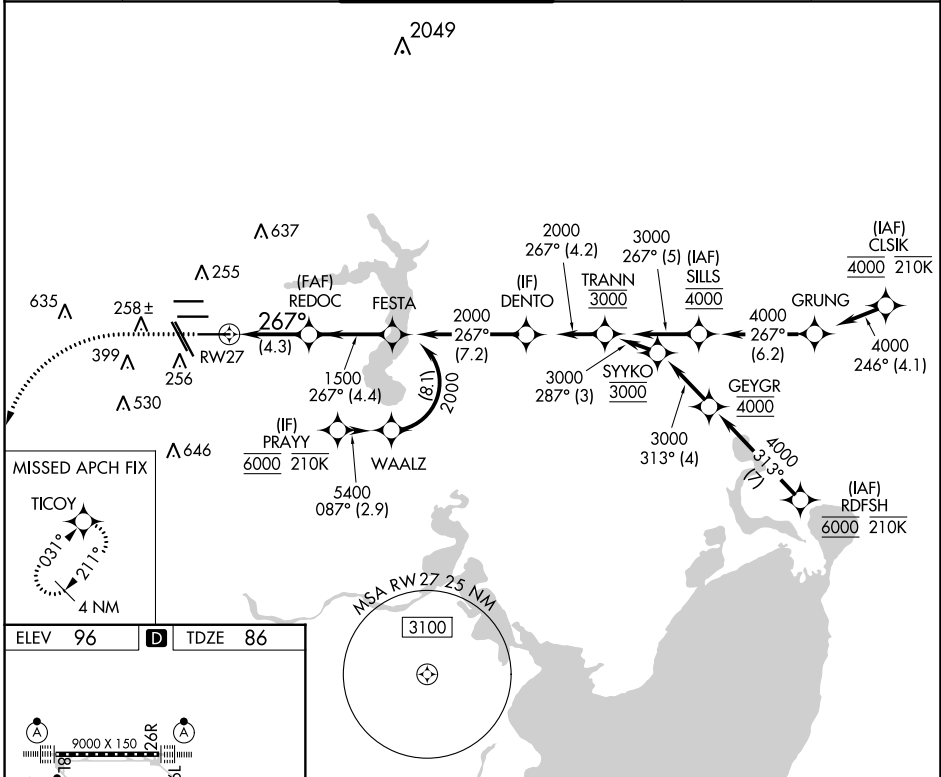


SC-5, 16 MAY 2024 to 13 JUN 2024

SC-5, 16 MAY 2024 to 13 JUN 2024

ELEV 96	<b>D</b>	TDZE 86
---------	----------	---------

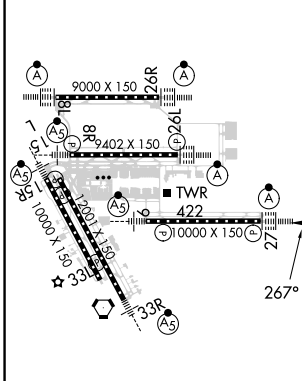

560	3000	TICOY	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 70).
-----	------	-------	--

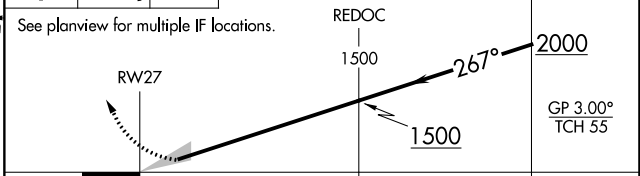

TDZ/CL Rwy 8L, 8R, 15R, 26R, 26L, 27 and 33L
HIRL all Rwy

CATEGORY	A	B	C	D
RNP 0.30 DA		380/24	294 (300-1/2)	

## AUTHORIZATION REQUIRED