


| | | | |
|--|------------------------|---|-------------|
| WAAS CH 90245 W04A | APP CRS 045° | Rwy Idg TDZE 1425 Apt Elev 1425 | 4098 |
|--|------------------------|---|-------------|

RNAV (GPS) RWY 4

ALEXANDRIA RGNL/CHANDLER FLD (AXN)

| | |
|--|---|
| RNP APCH - GPS. | MISSED APPROACH: Climb to 3000 direct KILVE and hold. |
| Rwy 4 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. | |

| | | |
|------------------------|--|---------------------------------|
| ASOS 118.375 | MINNEAPOLIS CENTER 126.1 269.2 | UNICOM 123.0 (CTAF) 1 |
|------------------------|--|---------------------------------|

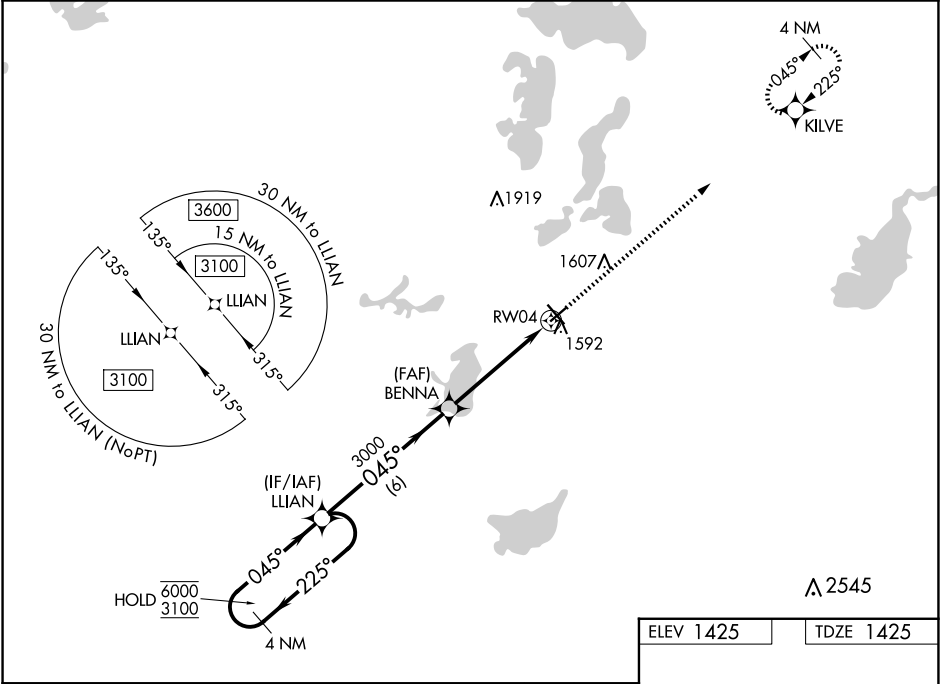

| | | | | |
|----------------------|----------------------|----------------------|--------------------|--------|
| 4 NM Holding Pattern | | LIAN | 3000 | KILVE |
| 6000 ← 225° | | | | |
| 3100 → 045° | | | | |
| GP 3.00° | | | | |
| TCH 44 | | | | |
| | | 6 NM | 3.6 NM | 1.2 NM |
| CATEGORY | A | B | C | D |
| LPV DA | 1675-1 250 (300-1) | | | |
| LNAV/VNAV DA | 1826-1½ 401 (500-1½) | | | |
| LNAV MDA | 1860-1 435 (500-1) | 1860-1¼ 435 (500-1¼) | | |
| CIRCLING | 1900-1 475 (500-1) | 1940-1½ 515 (600-1½) | 2000-2 575 (600-2) | |

