


|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>82532</b><br><b>W13A</b> | APP CRS<br><b>135°</b> | Rwy Idg<br>TDZE <b>386</b><br>Apt Elev <b>394</b> |
|--|------------------------|---|

RNAV (GPS) RWY 13

LEHIGH VALLEY INTL (ABE)

|   |   |  |  |                                  |
|---|---|--|--|----------------------------------|
| RNP APCH - GPS.   |   | MALSR                                  | MISSED APPROACH: Climb to 3000 direct KOCEC and on track 084° to LIZZI and hold. |                                  |
| ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. |   | AS                                     |  |                                  |
| ATIS<br><b>126.975</b>  | ALLENTOWN APP CON<br><b>119.65 124.45 351.8</b> | ALLENTOWN TOWER<br><b>120.5 257.95</b> | GND CON<br><b>121.9 257.95</b>   | CLNC DEL<br><b>124.05 257.95</b> |

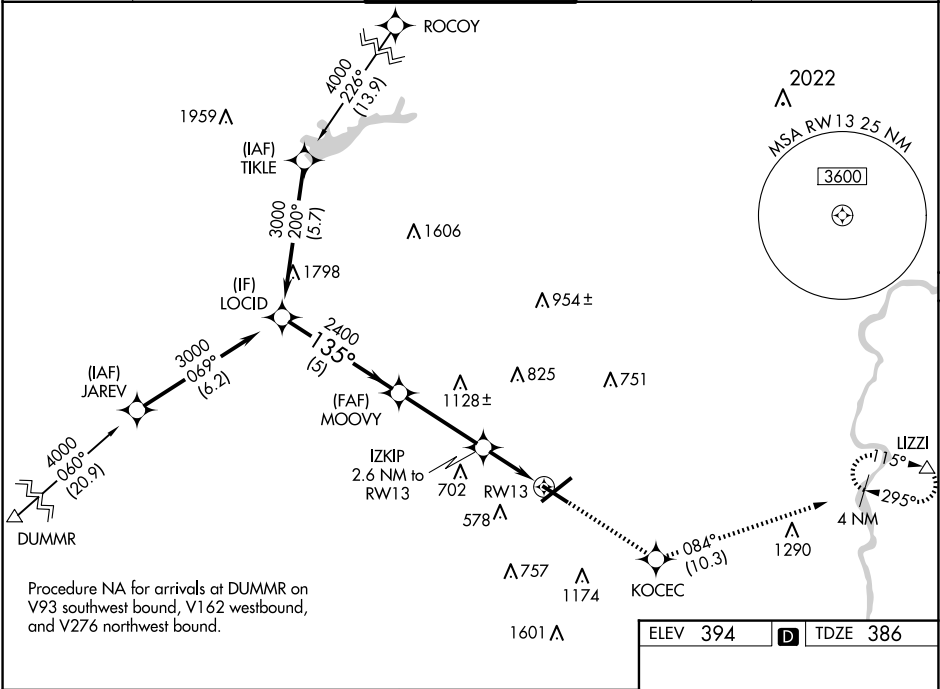

|                    |       |        |             |        |                         |        |                         |                 |  |         |  |
|--------------------|-------|--------|-------------|--------|-------------------------|--------|-------------------------|-----------------|--|---------|--|
| LOCID              |       | 3000   |             | MOOVY  |                         | IZKIP  |                         | RWY13           |  | LIZZI   |  |
| GP 3.00°<br>TCH 56 |       | 2400   |             | 2400   |                         | 1260   |                         | 1.1 NM to RWY13 |  | tr 084° |  |
| 5 NM               |       | 3.6 NM |             | 1.5 NM |                         | 1.1 NM |                         |                 |  |         |  |
| CATEGORY           | A     | B      | C           | D      |                         |        |                         |                 |  |         |  |
| LPV DA             | 586-½ |        | 200 (200-½) |        |                         |        |                         |                 |  |         |  |
| LNAV/<br>VNAV DA   | 700-½ |        | 314 (400-½) |        |                         |        |                         |                 |  |         |  |
| LNAV MDA           | 800-½ |        | 414 (500-½) |        | 800-¾                   |        | 414 (500-¾)             |                 |  |         |  |
| CIRCLING           | 900-1 |        | 506 (600-1) |        | 1180-2¼<br>786 (800-2¼) |        | 1600-3<br>1206 (1300-3) |                 |  |         |  |

