


LOC/DME I-GXZ 110.1 Chan 38	APP CRS 275°	Rwy Idg TDZE Apt Elev	26R 8500 990 1026	26L 9999 996 1026
---	------------------------	-----------------------------	---	---

ILS or LOC RWY 26R

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

RADAR required.		Rwy 26R MALSR	Rwy 26L MALSR	MISSED APPROACH: Climb to 1800 then climbing right turn to 4000 on RMG VORTAC R-132 to DALAS INT/RMG 18.5 DME and hold.
Simultaneous approach authorized. For inop ALS, increase sidestep Rwy 26L Cats A and B visibility ¼ SM.				
D-ATIS ARR 119.65 DEP 125.55	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4		
		ALL (8L-26R, 8R-26L) (9L-27R, 9R-27L) 10-28 RWYS 121.9 121.75 121.65 254.4		
		GND CON 118.1		
		ALL RWYS 254.4		

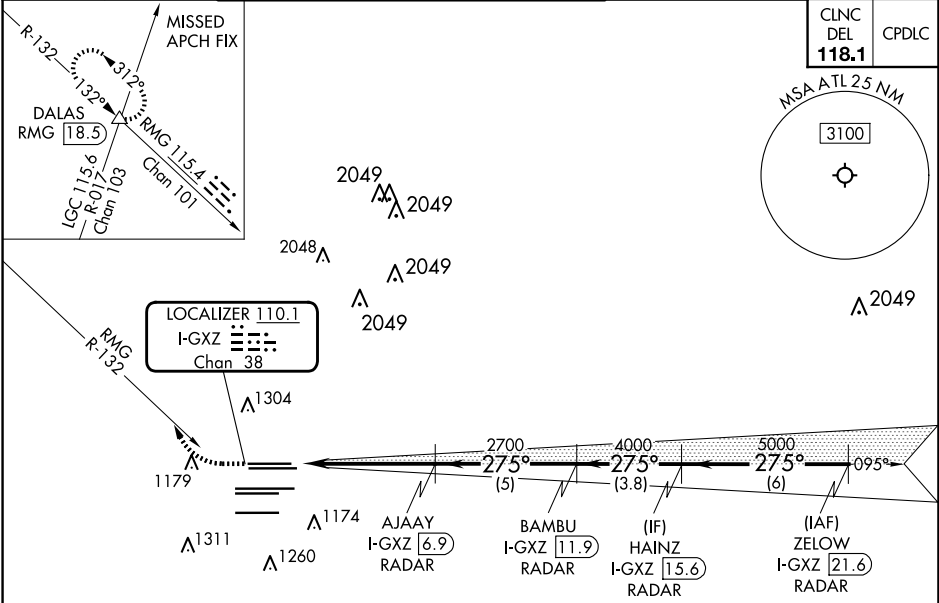

ELEV 1026	D	TDZE 26R 990 TDZE 26L 996
-----------	---	------------------------------

