


LOC/DME I-ROE	APP CRS	Rwy Idg	10801
109.5	238°	TDZE	641
Chan 32		Apt Elev	650

ILS or LOC RWY 24

BIRMINGHAM-SHUTTLESWORTH INTL (BHM)

DME or RADAR required.	MALSR	MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 direct VUZ VORTAC and hold. (TACAN aircraft continue on VUZ VORTAC R-333 to SIPSY/VUZ 14.8 DME and hold NW, right turn, 153° inbound).
▼ Rwy 24 helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-ILS 24 Cat E visibility to RVR 4000 and increase S-LOC 24 Cat A/B visibility to RVR 5500, and Cat C/D/E to 1 ½ SM. ** RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS	BIRMINGHAM APP CON	BIRMINGHAM TOWER	GND CON	CLNC DEL
119.4 270.1	123.8 256.8	119.9 317.725	121.7 348.6	125.675 305.2

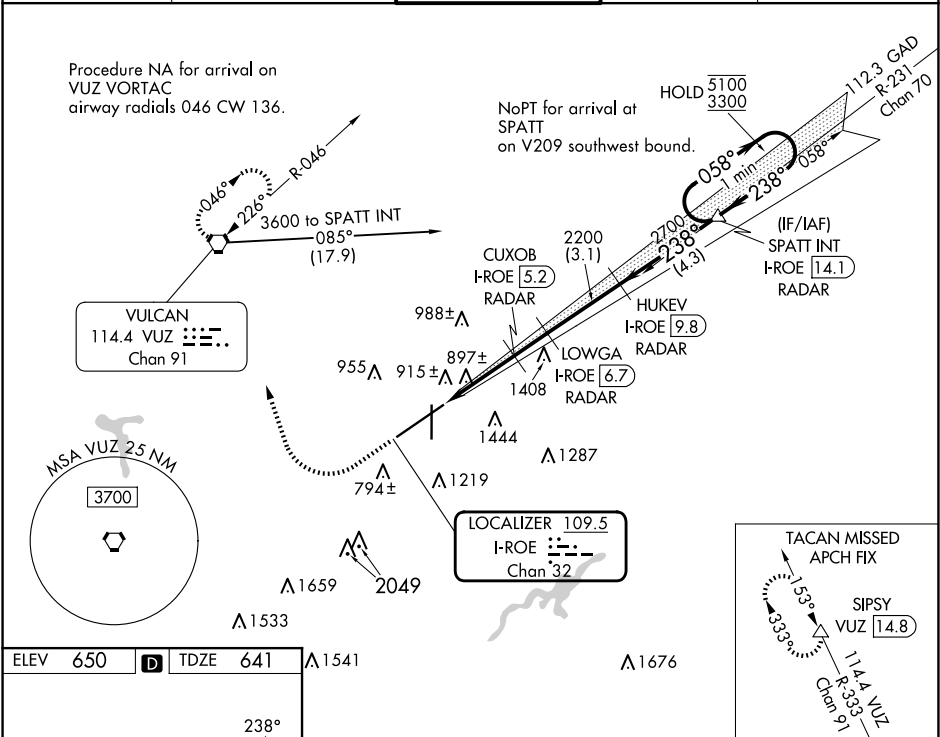

<div>REIL Rws 18 and 36</div> <div>TDZ/CL Rwy 6</div> <div>HIRL Rwy 6-24</div> <div>MIRL Rwy 18-36</div>	*LOC only.		VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 69).		SPATT INT I-ROE 14.1 One Minute Holding Pattern	
	CATEGORY	A	B	C	D	E
	S-ILS 24**	841/24 200 (200-½)				
S-LOC 24		1160/40	519 (600-¾)	1160/55	519 (600-1)	