
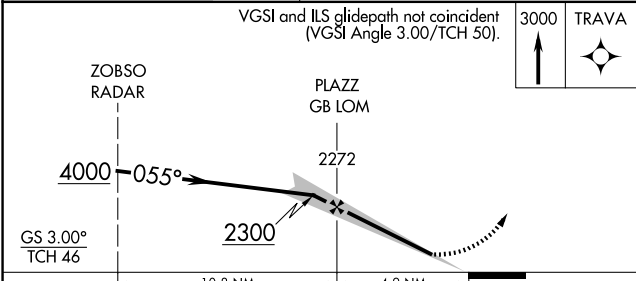


LOC I-GBI 108.5	APP CRS 055°	Rwy Idg 7569 TDZE 708 Apt Elev 727
---------------------------	------------------------	---


ILS or LOC RWY 5
BUFFALO NIAGARA INTL (BUF)

RADAR required for procedure entry. RNP APCH - GPS. ADF required for LOC only.		MALSR	MISSED APPROACH: Climb to 3000 direct TRAVA and hold.
Autopilot coupled approach NA. For inop ALS, increase S-LOC 5 Cats C and D visibility to RVR 5500.			

D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8	GND CON 133.2 257.8	CLNC DEL 124.7 257.8	CPDLC
-------------------------	--	-------------------------------------	-------------------------------	--------------------------------	-------

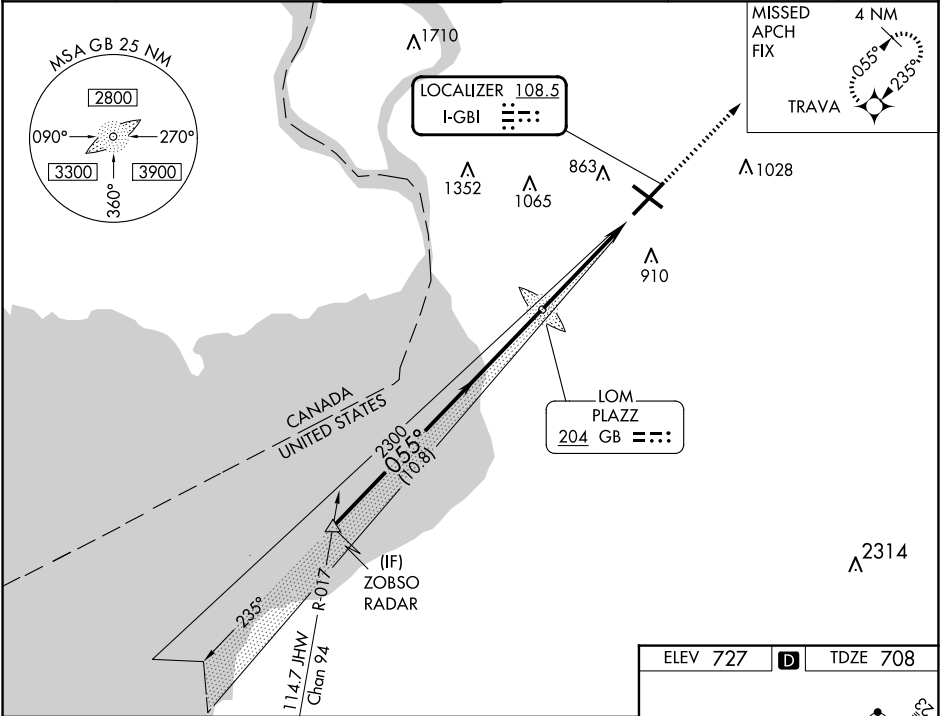

CATEGORY	A	B	C	D
S-ILS 5	908/18 200 (200-1/2)			
S-LOC 5	1060/24 352 (400-1/2)	1060/30 352 (400-5/8)		
CIRCLING	1200-1 473 (500-1)	1220-1 1/2 493 (500-1 1/2)	1340-2 613 (700-2)	

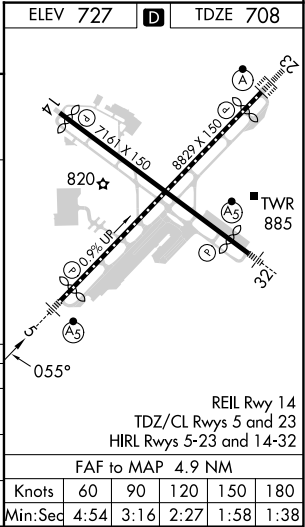

NE-2, 10 JUL 2025 to 07 AUG 2025

NE-2, 10 JUL 2025 to 07 AUG 2025