

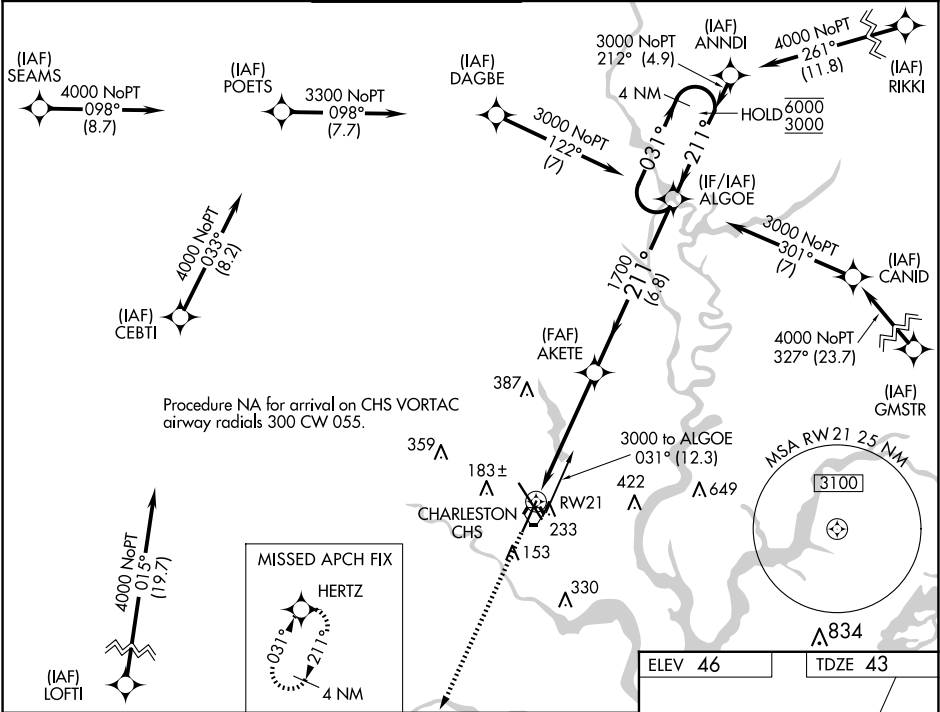
WAAS CH 40499 W21A	APP CRS 211°	Rwy Ldg TDZE Apt Elev 7000 43 46
--	------------------------	--



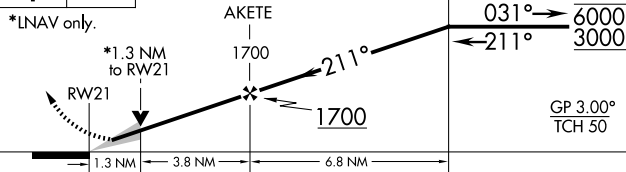

RNAV (GPS) Y RWY 21

CHARLESTON AFB/INTL (CHS)

RNP APCH.	MISSED APPROACH: Climb to 3000 direct HERTZ and hold, continue climb-in-hold to 3000.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.	

D-ATIS 124.75	CHARLESTON APP CON 120.7 306.925	CHARLESTON TOWER 126.0 239.0	GND CON 121.9 348.6	CLNC DEL 127.325 291.65	CPDLC
-------------------------	--	--	-------------------------------	-----------------------------------	-------



3000	HERTZ				
					
*LNAV only.					
					
CATEGORY	A	B	C	D	
LPV DA	293-3/4 250 (300-3/4)				
LNAV/VNAV DA	382-1 339 (400-1)				
LNAV MDA	500-1 457 (500-1)	500-1 3/8 457 (500-1 3/8)			
 CIRCLING	540-1 494 (500-1)	540-1 1/2 494 (500-1 1/2)		740-2 1/4 694 (700-2 1/4)	

