RNAV (RNP) X RWY 22L

CHICAGO MIDWAY INTL (MDW)

APP CRS	Rwy Ldg	5810
228°	TDZE	611
	Apt Elev	620

RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 1300 then climbing left turn to 2600 direct EON VORTAC and hold.

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL	CPDLC
132.75	128.2 353.875	135.2 269.125	118.075	124.625	

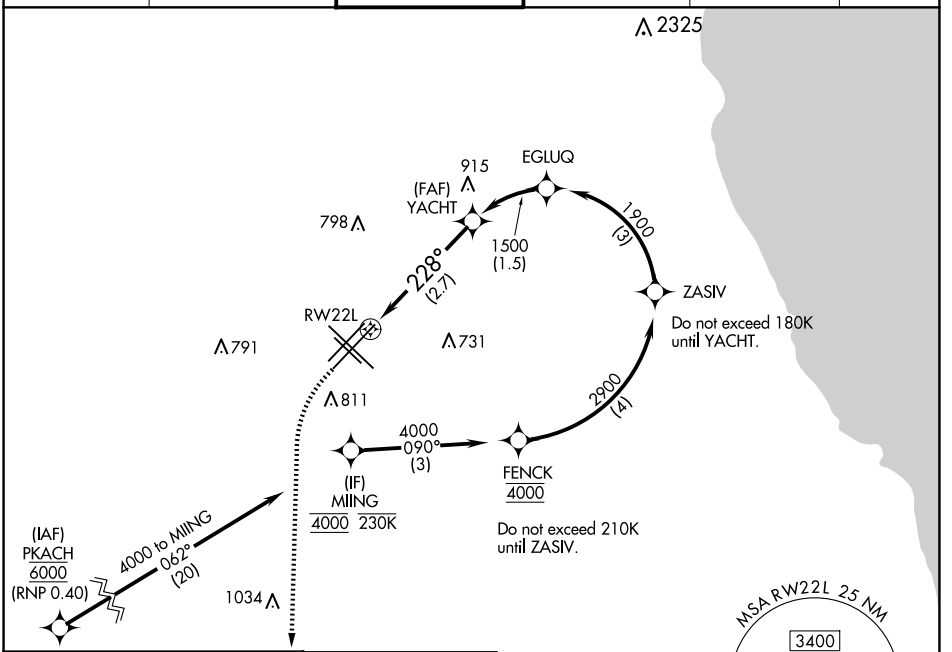



ELEV 620 D TDZE 611

MISSED APCH FIX

4 NM 181° 001°

PEOTONE
EON



1300 2600 EON

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).

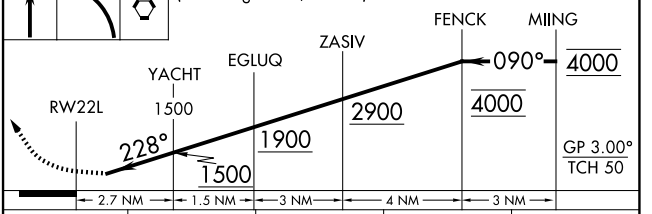

CATEGORY	A	B	C	D
RNP 0.10 DA		923/45	312 (400-⅞)	
RNP 0.20 DA		949/50	338 (400-1)	
RNP 0.30 DA		992/60	381 (400-1¼)	

AUTHORIZATION REQUIRED

MIRL Rwys 4L-22R and 13R-31L
HIRL Rwys 4R-22L and 13L-31R
REIL Rwys 4R, 22L and 31R
RLLS Rwys 13L and 31R

EC-3, 10 JUL 2025 to 07 AUG 2025
EC-3, 10 JUL 2025 to 07 AUG 2025