

LOC I-NGP 111.3	APCH CRS 132°	Rwy Idg TDZE Arpt Elev 8001 13 18
---------------------------	-------------------------	---

ILS Y or RNAV (GPS) RWY 13R

[USN]CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)


RNP APCH for LNAV.
RNAV1 - GPS for ILS.

SALSF

MISSED APPROACH: Climb to 600, then climbing left turn to 1600 direct HAULS and hold.

When ALS inop, increase CAT AB vis to 1 mile; CAT CD vis to 1½ miles.

ATIS★ 127.9 290.9	APP CON 128.675 343.75	NAVY CORPUS TOWER★ 134.85 340.2	GND CON 118.7 257.85	CLNC DEL 314.3	ASR/ PAR
-----------------------------	----------------------------------	---	--------------------------------	--------------------------	-------------

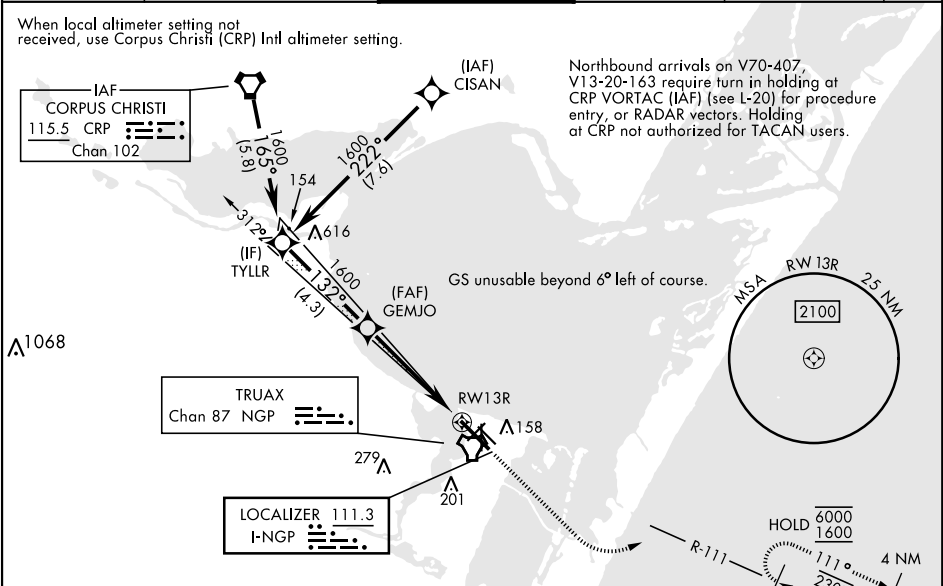

EMERG SAFE ALT 100 NM 11,100

VDP not authorized when using Corpus Christi (CRP) Intl altimeter setting

600

1600

HAULS

TYLLR

GEMJO

1600

132°

1600

1.3 NM to RWY13R

RWY13R

4.8 NM

GS 3.00° TCH 47

CATEGORY	A	B	C	D
S-ILS 13R	213-¾	200	(200-¾)	
LNAV MDA*	460-¾ 447 (500-¾)	460-1 447 (500-1)		
CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	580-2 562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
S-ILS 13R	246-¾	233	(300-¾)	
LNAV MDA*	500-¾ 487 (500-¾)	500-1½ 487 (500-1½)		
CIRCLING	500-1 482 (500-1)	540-1½ 522 (600-1½)	620-2 602 (700-2)	

ELEV 18

TDZE 13

Diagram showing the approach path, including the IAF, IF, FAF, and RWY 13R, with various altitudes and distances.