

RNAV (RNP) Y RWY 24R

JAMES M COX DAYTON INTL (DAY)

APP CRS 241°	Rwy Idg 10900 TDZE 997 Apt Elev 1009
------------------------	---

RNP AR APCH.

T For inop ALS, increase RNP 0.10 all Cats visibility to RVR 5500 and RNP 0.30 all Cats visibility to 1 3/8 SM. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.

MALSR




MISSED APPROACH: Climb to 3000 on track 241° COWD and hold.

ATIS
125.8


COLUMBUS APP CON
134.45 323.15

DAYTON TOWER
119.9 257.7


GND CON
121.9

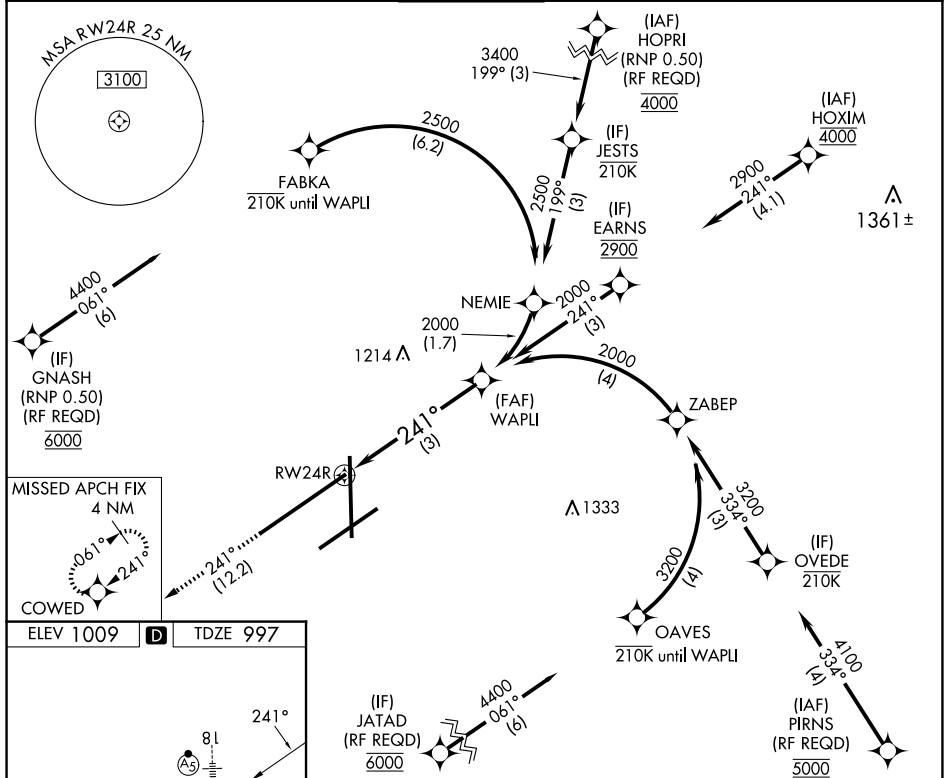CLNC DEL
121,75

FIFV 1009		TDZE 997
-----------	---	----------



3000		COWED	See planview for multiple IF locations.
------	--	-------	---

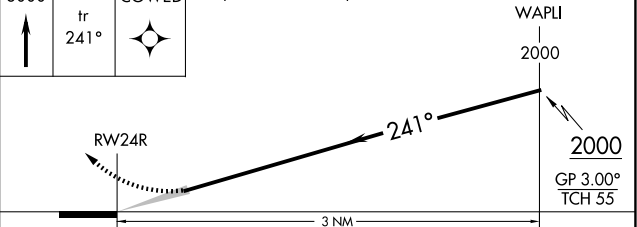

CATEGORY	A	B	C	D
RNP 0.10 DA		1334/35	337 (400-%)	
RNP 0.30 DA		1418/50	421 (500-1)	

AUTHORIZATION REQUIRED

DAYTON, OHIO
Orig-C 16AUG18

JAMES M COX DAYTON INTL (DAY)
39°54'N-84°13'W **RNAV (RNP) Y RWY 24R**