

APP CRS	Rwy Ldg	10001
216°	TDZE	632
	Apt Elev	645

RNAV (RNP) X RWY 21L
DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.


Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.

MALS




MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct GAAGE and hold, continue climb-in-hold to 4000.

D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC
133.675	125.15 284.0	118.4 317.725	121.8 (NW) 132.725 (SW)	119.45 (NE) 119.25 (SE)	120.65

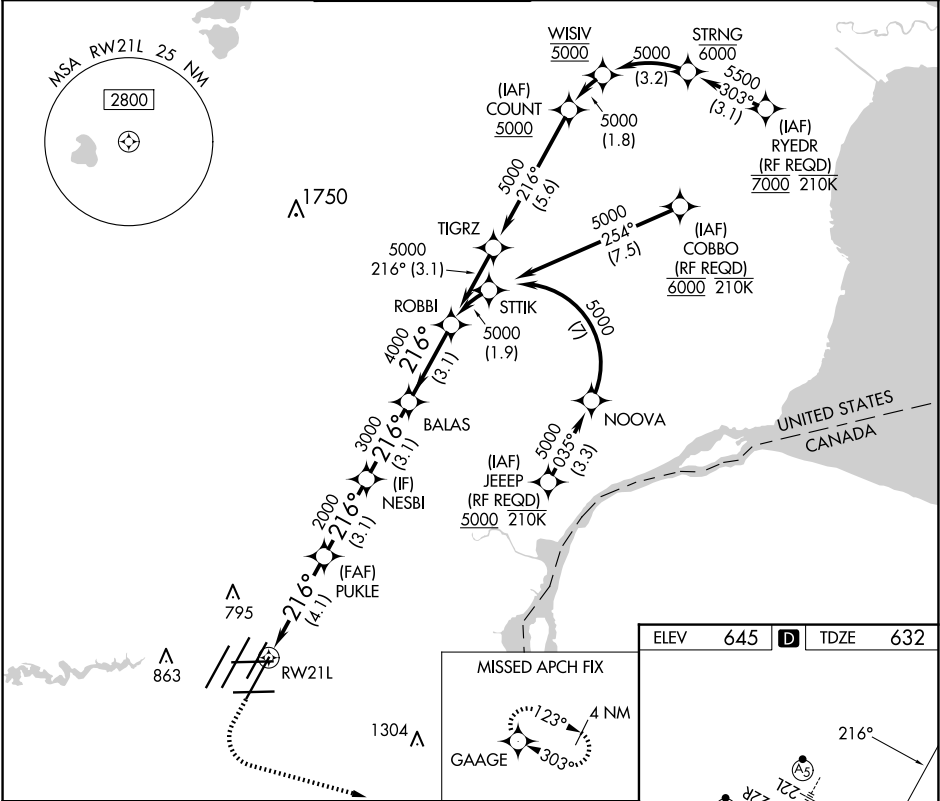

1100	4000	GAAGE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 80).	ROBBI
CATEGORY	A	B	C	D
RNP 0.30 DA	1062/40 430 (500-¾)			
AUTHORIZATION REQUIRED				

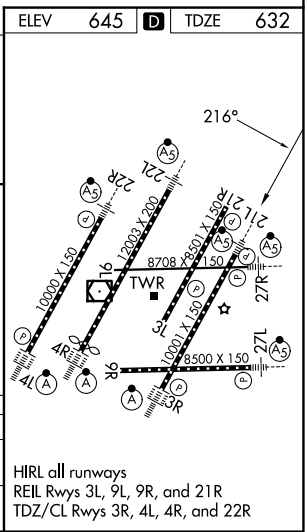

EC-1, 10 JUL 2025 to 07 AUG 2025

EC-1, 10 JUL 2025 to 07 AUG 2025