

WAAS CH <b>82241</b> <b>W04D</b>	APP CRS <b>036°</b>	Rwy Ldg <b>10000</b> TDZE <b>645</b> Apt Elev <b>645</b>
--	------------------------	--

RNAV (GPS) Z RWY 4L  
DETROIT METRO WAYNE COUNTY (DTW)

RNP APCH


Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000.

ALSF-2



MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct DOHNT and hold.

D-ATIS <b>133.675</b>	DETROIT APP CON <b>124.05 284.0</b>	METRO TOWER <b>135.0 317.725</b>	GND CON <b>121.8 (NW) 119.45 (NE)</b> <b>132.725 (SW) 119.25 (SE)</b>	CLNC DEL <b>120.65</b>	CPDLC
--------------------------	--	-------------------------------------	---	---------------------------	-------

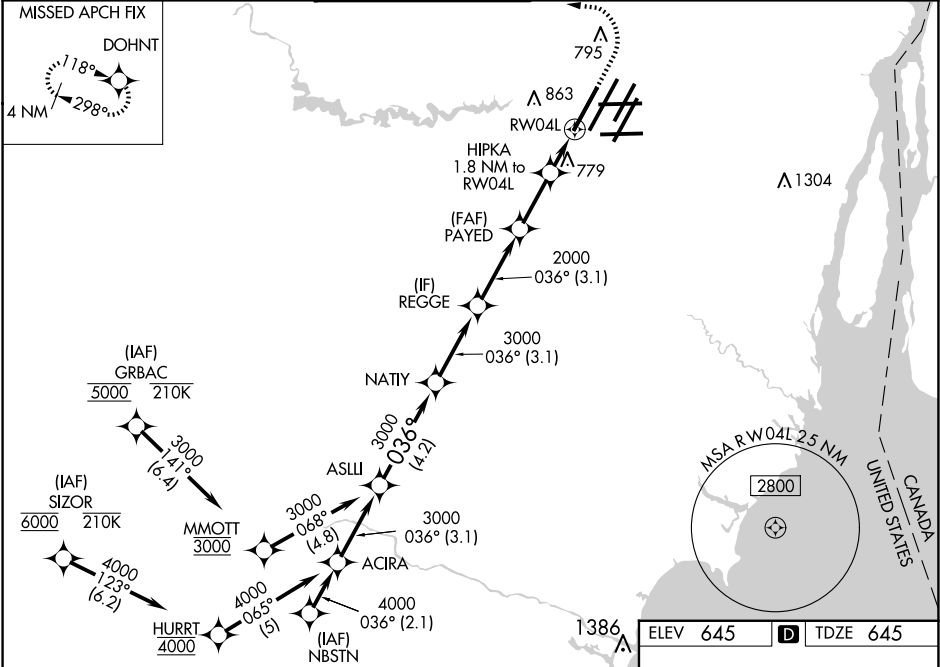

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).						<div>1100</div> <div>4000</div> <div>DOHNT</div>	
<div>ASLII NATIY REGGE PAYED HIPKA</div> <div>3000 3000 3000 2000</div> <div>GP 3.00° TCH 55</div> <div>036° 3000 3000</div> <div>2000</div> <div>*1260</div> <div>1.8 NM to RW04L</div> <div>*1 NM to RW04L</div> <div>RW04L</div> <div>4.2 NM 3.1 NM 3.1 NM 2.3 NM 0.8 NM 1 NM</div> <div>A B C D</div> <div>*LNAV only.</div>							
CATEGORY							
LPV DA		845/18		200 (200-½)			
LNAV/VNAV DA		1046/40		401 (500-¾)			
LNAV MDA		1040/24		395 (400-½)		1040/35 395 (400-⅝)	
CIRCLING		1180-1 535 (600-1)		1180-1½ 535 (600-1½)		1240-2 595 (600-2)	
TDZ/CL Rwy 3R, 4L, 4R and 22R REIL Rwy 3L, 9L, 9R and 21R HIRL all runways							